


Wireless Sensor Telemetry System

Series 540 One-Channel Digital Telemetry System

- Single channel strain gage or thermocouple based transducer measurements
- 14-bit resolution and digital transmission provides accurate error free data
- Integrated strain gage driver with excitation and shunt mode for setup and verification of data
- Medium to short range operation
- Rugged environmentally sealed housing
- Powered by battery or induction power

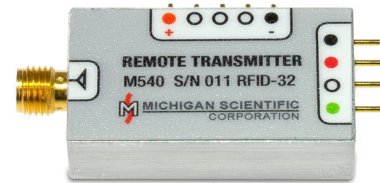

Description

Michigan Scientific *Series M540 Digital Telemetry System* is designed for transmitting a single channel of strain or thermocouple based transducer measurements using a very small transmitter package. This system offers 14-bit resolution and a fully differential amplifier for high common mode rejection with anti-aliasing filter prior to digitization. The strain gage driver is configured with its own gain and shunt resistor making system configuration flexible.

The system is designed with RF diversity features and error checking to prevent data loss and corruption due to reflections or shadowed transmissions from the transmitter. Output data is provided as high-level $\pm 10V$ analog on a rear connector for direct interface with most data acquisition systems, or the data can be captured in digital format for immediate display and collection via an Ethernet port to a PC. Analog output options include options for data cutoff frequencies and adjustment of zero offset. Indication of transmitter and receiver status is provided by LED indicators on the receiver's front panel. Analog output signals can be monitored for quality of transmission, low power conditions, and shunt status at the transmitter.

Typical applications include measurements on rotating equipment and where access by a wired sensor is not possible. The system's hardened design is intended for operation in hostile environments where vibration, extreme temperatures, high accelerations, and contaminants are present. These features ensure successful data measurements using our newest technology. Please visit our website at www.michsci.com for a complete list of telemetry based measurement devices and accessories.

8500 Ance Road
Charlevoix, MI 49720
Tel: 231-547-5511
Fax: 231-547-7070

MICHIGAN SCIENTIFIC
<http://www.michsci.com>
Email: miscinfo@michsci.com
corporation

321 East Huron Street
Milford, MI 48381
Tel: 248-685-3939
Fax: 248-684-5406

8/3/15

Rev. A

Wireless Sensor Telemetry System

Specifications

PARAMETER	SPECIFICATION
TRANSMITTER	
Data transmission method	2.4GHz carrier with FSK modulation
Analog channels	Single strain gauge bridge or thermocouple
ADC resolution	14-bit, no missing codes
ADC sample rate	15,000 samples per second
Analog anti-aliasing filter	3-pole Bessel; 5,000 Hz@-3dB
Data Bandwidth	DC to 5000 Hz
Bridge drive excitation voltage	3.0VDC
Bridge amplifier input range	customer specified (mV/V)
Operating temperature	-40°F to +257°F (-40°C to +125°C)
Power requirement	6VDC to 9VDC / 38mA
Dimensions (L x W x H)	0.90" x 0.50" x 0.20" (23mm x 13mm x 5.1mm) PCB only 0.90" x 0.50" x 0.20" (23mm x 13mm x 5.1mm) PCB only
Weight	0.88 Ounces (2.5 grams) PCB only 0.42 Ounces (12 grams) enclosed
RECEIVER	
Output at full scale	±10V
DAC output resolution	14-bit, resolving down to 1.22mV
DAC update rate	15,000 updates per second
Data filter cutoff selections (-3dB)	100Hz, 5.00kHz
Channel filter type	2-pole Bessel
Current output per channel	±35 mA
Operating temperature	-40°F to +158°F (-40°C to +70°C)
RF antenna connector (2)	reverse polarity SMA
Power requirement	9 to 36VDC / 500mA
Dimensions (L x W x H)	7.0" x 3.5" x 1.5" (180mm x 89mm x 38mm) non-induction 7.0" x 3.5" x 2.5" (180mm x 89mm x 64mm) with induction
SYSTEM GENERAL	
RF channels available	16
Total system delay	TBD

8500 Ance Road
Charlevoix, MI 49720
Tel: 231-547-5511
Fax: 231-547-7070
8/3/15

MICHIGAN SCIENTIFIC
corporation

<http://www.michsci.com>
Email: miscinfo@michsci.com

321 East Huron Street
Milford, MI 48381
Tel: 248-685-3939
Fax: 248-684-5406