

1008431000

## CRM-V-2

IP Flush Master Station



**IC-EDGE** IC-Edge



**ICX-AlphaCom**

**Control Room Solutions**

 **Automatic Gain Control**

 **Active Noise Cancelling**

 **Open Duplex**

## DESCRIPTION

- Compatible with AlphaCom, IC-EDGE and iPBXs (SIP)
- Made for CCoIP® - Critical Communication over IP
- Robust aluminium front plate
- Large high contrast display with backlight for excellent readability
- Four dynamic navigation keys and four DAK keys for quick access to system menus and directory entries.
- White light behind all keys for excellent readability in dark environments
- Optional noise cancelling goose-neck microphone
- Optional handset unit
- Optional IP DAK-48 Unit
- Remote software upgrade, configuration and monitoring
- ONVIF Compatible
- Integrated data switch with advanced networking and security functions
- Powered from the IP network cable using Power over Ethernet (PoE)
- Superb audio quality – high bandwidth codec, active noise cancellation, acoustic echo cancellation and high output power amplifier
- Clean relay output contact for control of external equipment

The CRM-V-2 IP Flush Master with Display is an IP control room intercom intended for use in control and guard rooms. The station features a large high contrast display with adjustable backlight and up to 8 lines with 20 characters. The station has four direct access keys. Each key has a red and a green LED to show status.

The IP station supports open standards and is compatible with ICX-AlphaCom, IC-EDGE and iPBXs using SIP technology. When working in ICX-AlphaCom mode, the IP station supports special services only available using the CCoIP protocol, as employed by the AlphaCom server. Examples of services are emergency broadcast with volume override, CCTV integration, call priority, and AlphaNet multisite networking and event scripting.

Like all Zenitel stations, the CRM-V-2 features superb audio quality. This is enabled through a set of advanced technologies such as active noise filtering, acoustic echo cancellation, wide band audio codec, and high power audio outputs. The IP station has an integrated managed data switch providing advanced networking and security features. The integrated switch provides support for:

- Protection from unwanted access
- Quality of Service (QoS) by managing data traffic
- Cost efficient installation by providing shared network connections

To provide maximum availability the station comes with advanced supervision functions. The station line test will detect if there is any faults in the network or station electronics. In addition the station supports tone test, testing the complete transmission path including microphone and speaker. The status of the stations is reported to AlphaWeb as well as to 3rd party management systems using SNMP, Syslog or OPC.

In IC-EDGE mode, the CRM-V-2 can be configured as the Edge Controller.


See also: [additional documentation on wiki.zenitel.com](https://www.zenitel.com/wiki/additional_documentation_on_wiki.zenitel.com)

## SPECIFICATIONS

### GENERAL

Dimensions (WxHxD)	125 x 280 x 33 mm
Weight	0.63 kg
Temperature Range	-15°C to + 50°C
Relative humidity	< 95% not condensing
User interface	Backlit graphical display, 35 mm x 68 mm, 4 function keys, 4 programmable direct access keys (DAK), Green/Red status, LED per DAK, Full keypad, Call indication LED
Power	Power over Ethernet, IEEE 802.3 a-f, Class 0, Local power 19 – 27 VDC, Idle 4W, max. 8W
Connectors	RJ45 (Ethernet) - RJ11 (Handset & Headset), Pluggable screw terminals (I/O local power)
Remote control Max. switching capacity , Max. voltage relay, Max current relay	3 digital inputs, 1 relay output and one logical output, 30W DC, 60V DC, 1A DC
SIP	RFC 3261, SIP Info (DTMF), RFC 2833 (DTMF)
IP protocols	IP v4 - TCP - UDP - HTTPS – TFTP - RTP - RTCP -DHCP - SNMP - DiffServ - TOS – ONVIF - CCoIP® - SIP
LAN protocols	Power over Ethernet (IEEE 802.3 a-f), VLAN (IEEE 802.1pq), Network Access Control (IEEE 802.1x)
Audio technology	Telephony 3.4kHz (G.711) , Wideband/HD Voice (G.722), Active noise filtering, Acoustic echo cancellation, Open duplex, Volume override
Audio output	1.5 Watt - 75 dB @ 1 m from speaker, additional connector for external speaker, max 5 W
Management and operation	HTTPS (Web configuration), DHCP and static IP, Remote automatic software upgrade, Centralized monitoring, Status LED
Advanced features	Dual port managed data switch supporting VLAN and network access control
Compliance	CE and FCC Part 15
IP Rating	IP-32

# TECHNICAL DIMENSIONS

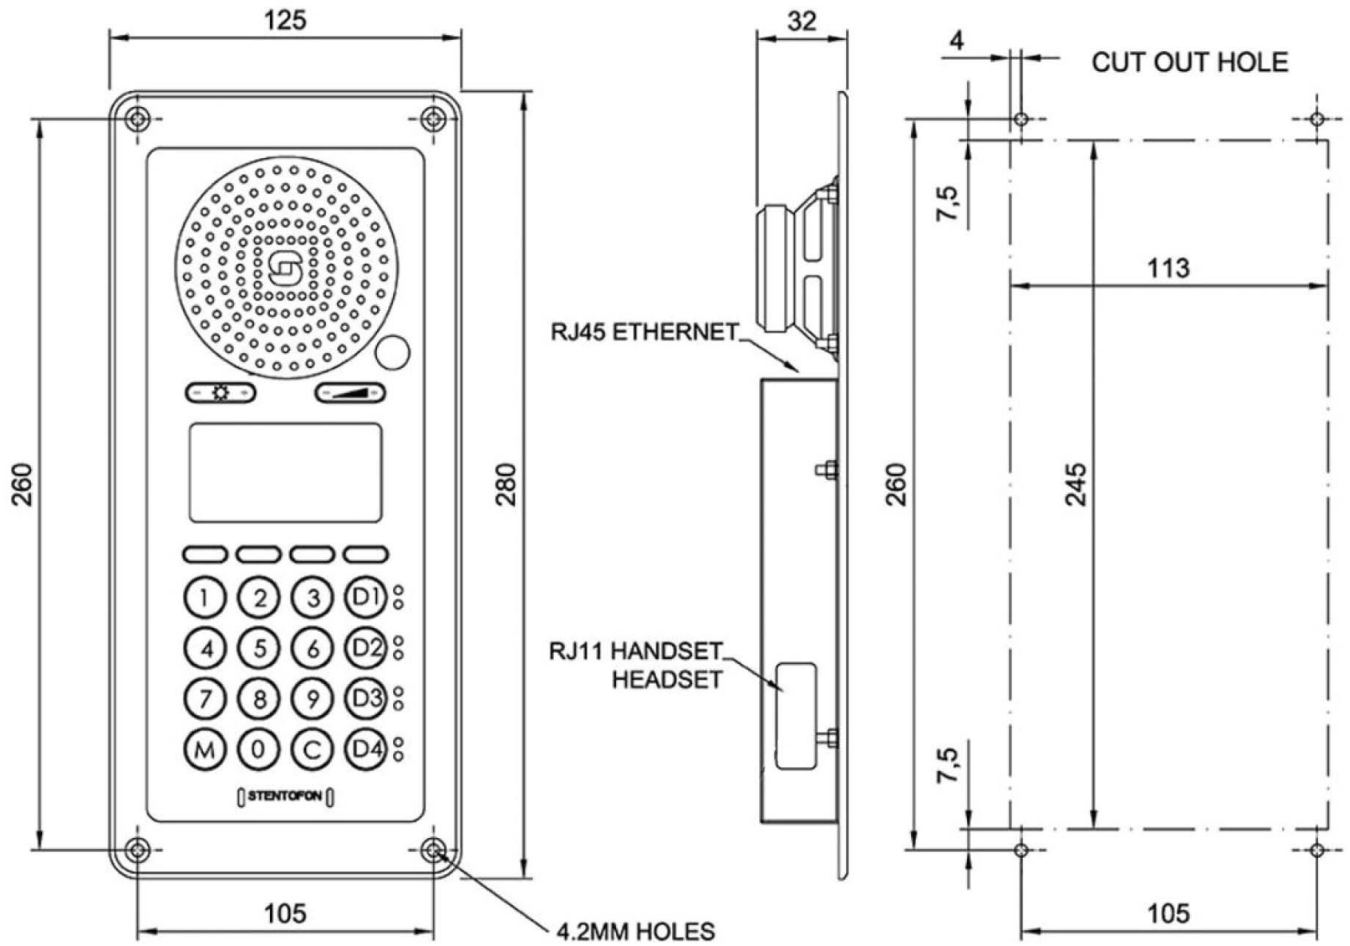

## ACCESSORIES



**CRM-V-DAK48**

Item number: 1008010100



**CRM-V-GN**

Item number: 1008097500



**CRM-V-HS**

Item number: 1008097100



**ON-WALL BACK BOX**

Item number: 1008098600



**FLUSH MOUNT BACK BOX**

Item number: 1008098700



**DESK STAND FOR IP FLUSH MASTER**

Item number: 2810020001



**SINGLE DESK STAND**

Item number: 2810020006



**DUAL DESK STAND**

Item number: 2810020005



**TRIPLE DESK STAND**

Item number: 2810020004



**CRM-VH**

Item number: 2213100000