


TECHNICAL SPECIFICATIONS					
First stage efficiency		H13 Minimum efficiency for most penetrating particle size (EN 1822) $\geq 99.95\%$			
Recommended final pressure drop		800 Pa			
Max working temperature		70°C			
Model	No. modules	Max air flow*	\varnothing	A	B
		m ³ /h	[mm]	[mm]	[mm]
S1x1	1	4000	280	828	790
S1x2	2	8000	380	1546	790
S1x3	3	12000	480	2264	790
S1x4	4	16000	550	2982	790
S2x2	4	16000	2x380	1546	1580
S2x3	6	24000	2x480	2264	1580
S2x4	8	32000	2x550	2982	1580

*Air flow changes according to the pollution substance and its concentration.

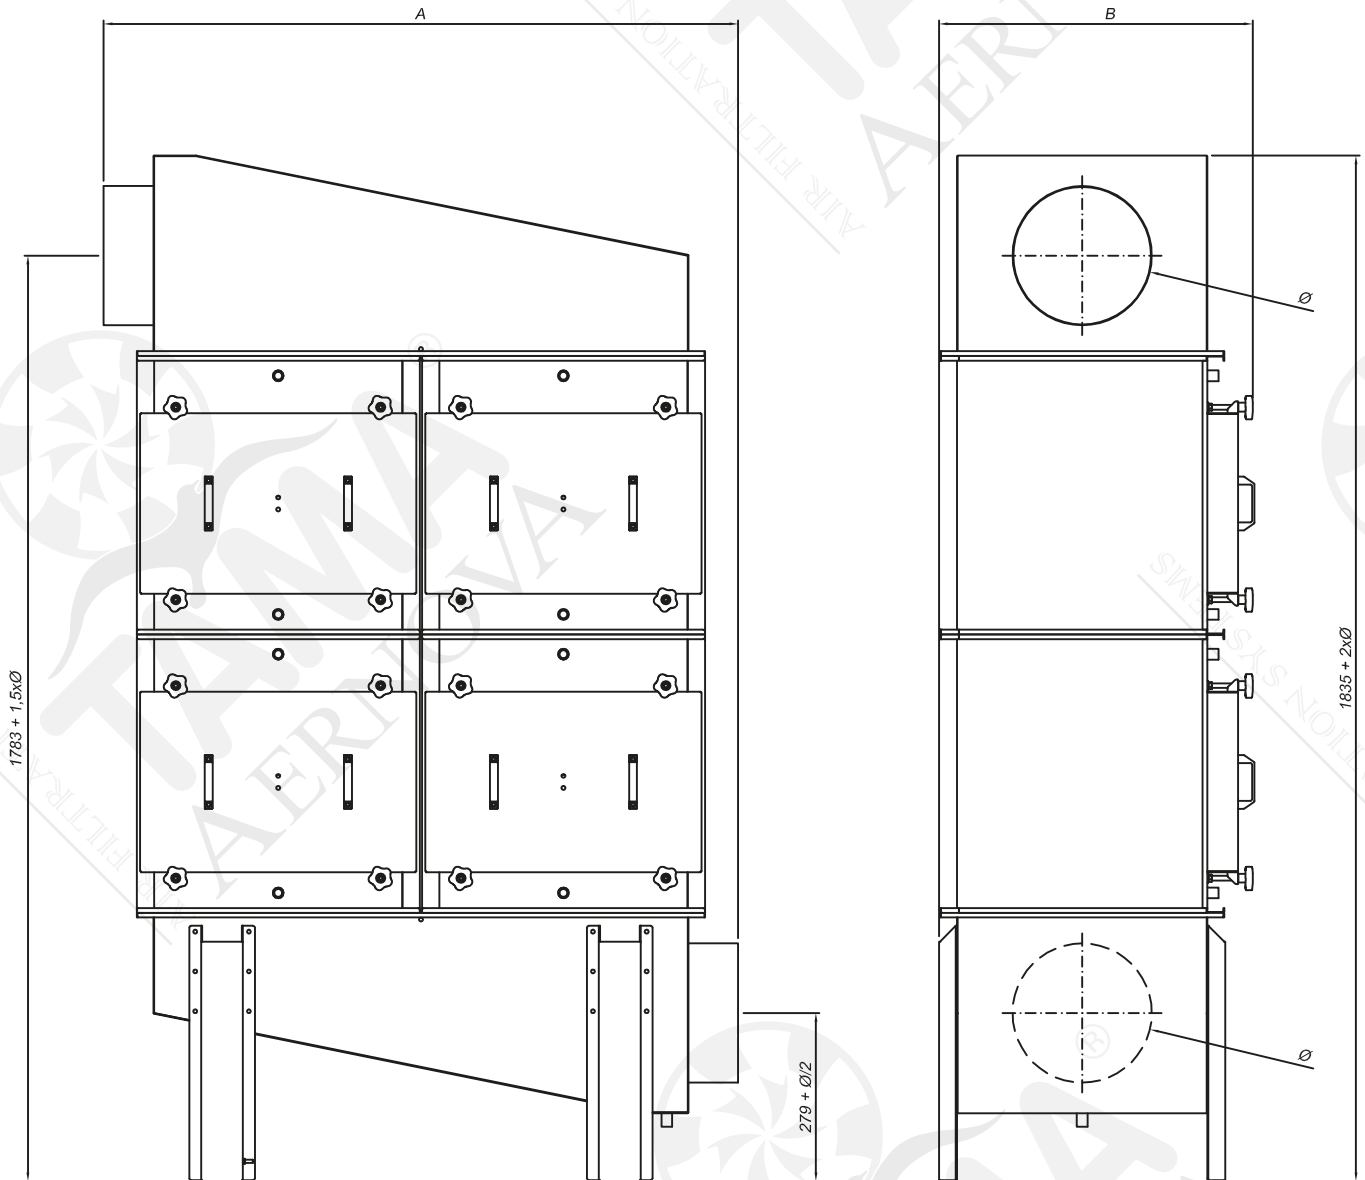

TECHNICAL SPECIFICATIONS

First stage efficiency	F9 (EN 779 : 2012) $\geq 95\%$				
Second stage efficiency	H13 Minimum efficiency for most penetrating particle size (EN 1822) $\geq 99.95\%$				
Recommended final pressure drop	1300 Pa				
Max working temperature	70°C				
DIMENSIONS					
Model	No. modules	Max air flow*	\emptyset	A	B
		m ³ /h	[mm]	[mm]	[mm]
D1x1	2	4000	280	828	790
D1x2	4	8000	380	1546	790
D1x3	6	12000	480	2264	790
D1x4	8	16000	550	2982	790
D2x2	8	16000	2x380	1546	1580
D2x3	12	24000	2x480	2264	1580
D2x4	16	32000	2x550	2982	1580

*Air flow changes according to the pollution substance and its concentration.