


OUTLET FLANGE DETAIL

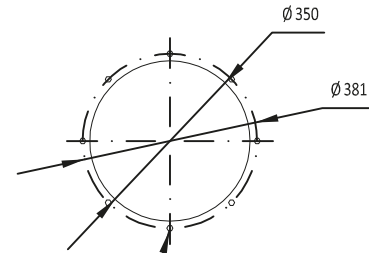

Nr.8 connections to screw M8

TECHNICAL SPECIFICATIONS

DIMENSIONS

Model	Working width	Minimum working length	Maximum working length	Suction channels	Weight (standard version)	Pneumatic feeding (ISO Class 2.4.1 according to 8573-1: 2010)	Compressed air consumption	Max cutting thickness with plate 100x5 space between pleats 110	Max load with plate 100x5 space between pleats 100	Max cutting thickness with plate 150x8 space between pleats 150	Max load with plate 150x8 space between pleats 150	Total width of cutting table
	[mm]	[mm]	[mm]		nr							kg/m
WT-1500	1500	2000	60000	1	430	Ø8	0.7	75	592	100	790	1625
WT-2000	2000				550							2125
WT-2500	2500				670							2625
WT-3000	3000			790	2		1.5					3125
WT-3500	3500			920			3625					
WT-4000	4170			1100			4250					
WT-5000	5170			1340			5250					

Suction area 500 mm STANDARD - Suction area 750 mm OPTIONAL