
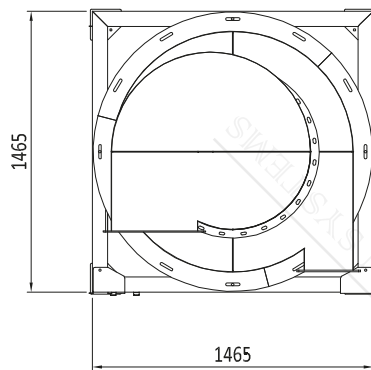
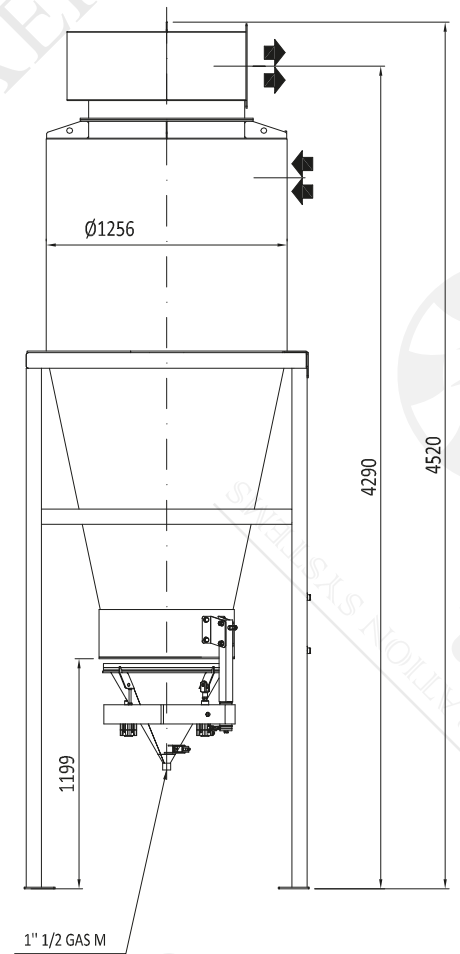




TECHNICAL SPECIFICATIONS		
ITEM CODE	V-AREN 1150	
Weight	kg	660
Max working negative pressure	Pa	5000
Pneumatic feeding (ISO Class 2.4.1 according 8573-1:2010)	mm	8
Max level of compressed air	bar	4
PERFORMANCE CHARACTERISTICS		
Nominal air flow	m <sup>3</sup> /h	9000
Pressure drop*	Pa	1599
Efficiency*	%	97.2

\* Efficiency and pressure drop were calculated by reference to a typical polyester powder used for coating of steel

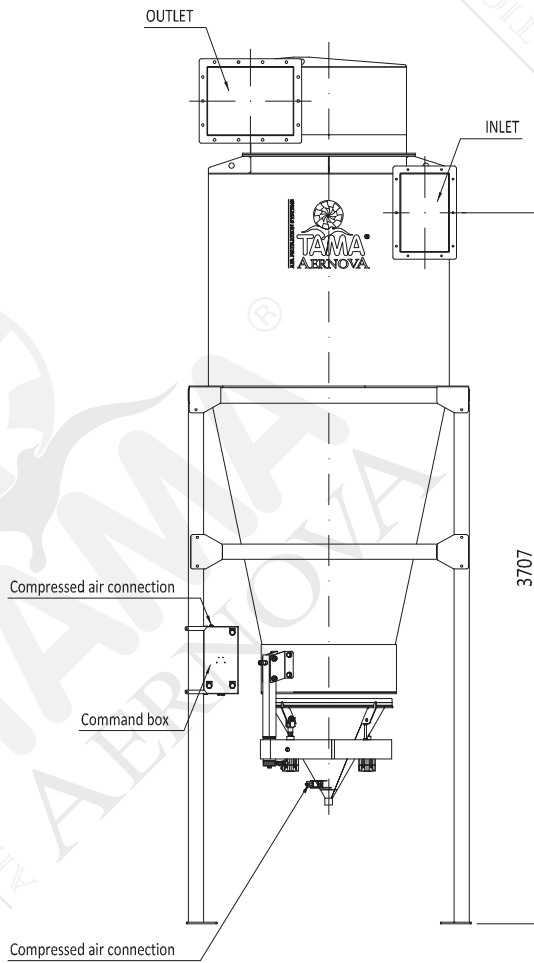

INLET FLANGE DETAIL






OUTLET FLANGE DETAIL

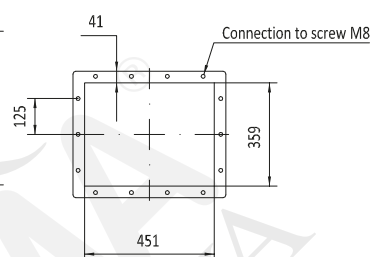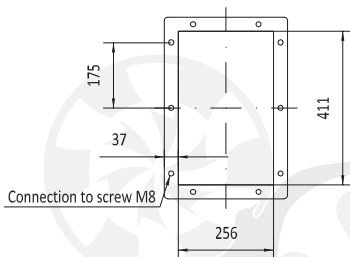

TECHNICAL SPECIFICATIONS



ITEM CODE	V-AREN 1250		
Weight	kg		750
Max working negative pressure	Pa		5000
Pneumatic feeding (ISO Class 2.4.1 according 8573-1:2010)	mm		8
Max level of compressed air	bar		4
PERFORMANCE CHARACTERISTICS			
Nominal air flow	m <sup>3</sup> /h		12000
Pressure drop*	Pa		1610
Efficiency*	%		97.4

\* Efficiency and pressure drop were calculated by reference to a typical polyester powder used for coating of steel

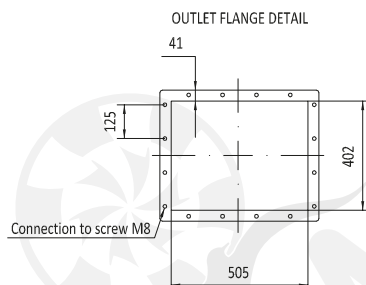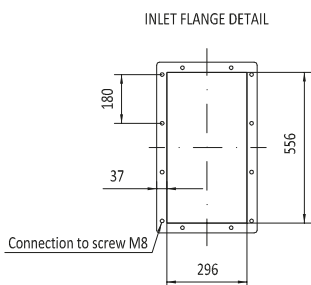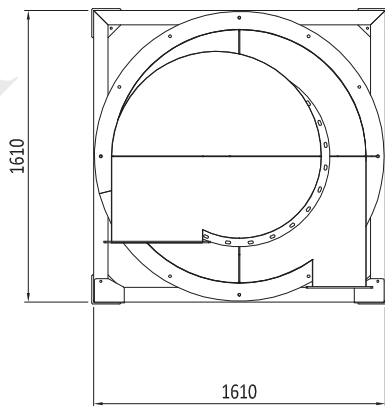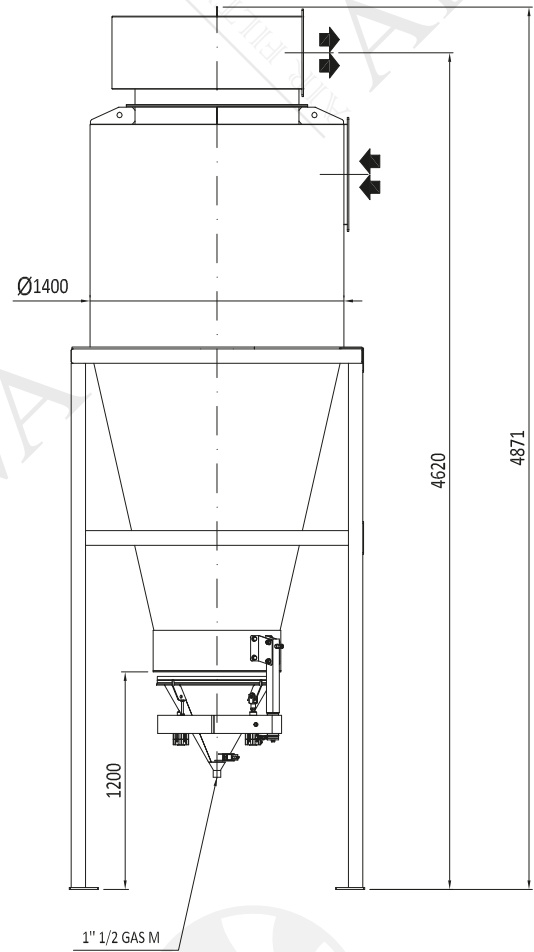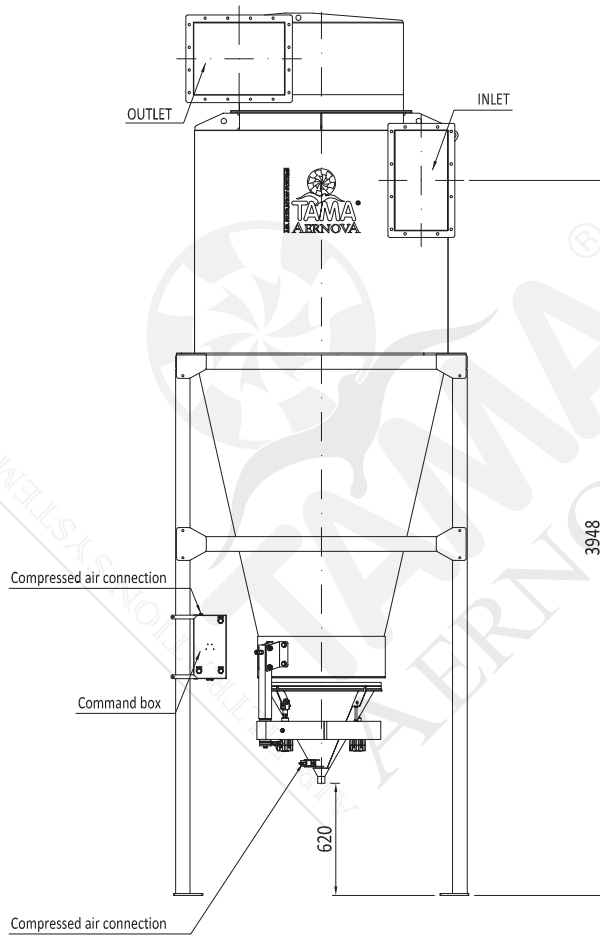


TECHNICAL SPECIFICATIONS		
ITEM CODE	V-AREN 1400	
Weight	kg	860
Max working negative pressure	Pa	5000
Pneumatic feeding (ISO Class 2.4.1 according 8573-1:2010)	mm	8
Max level of compressed air	bar	4
PERFORMANCE CHARACTERISTICS		
Nominal air flow	m <sup>3</sup> /h	16000
Pressure drop*	Pa	1430
Efficiency*	%	96.4


\* Efficiency and pressure drop were calculated by reference to a typical polyester powder used for coating of steel

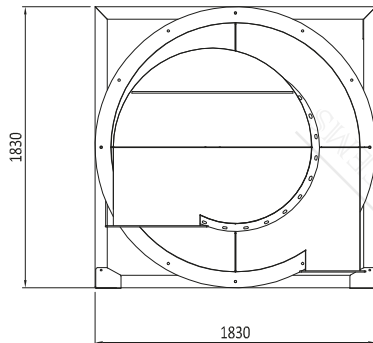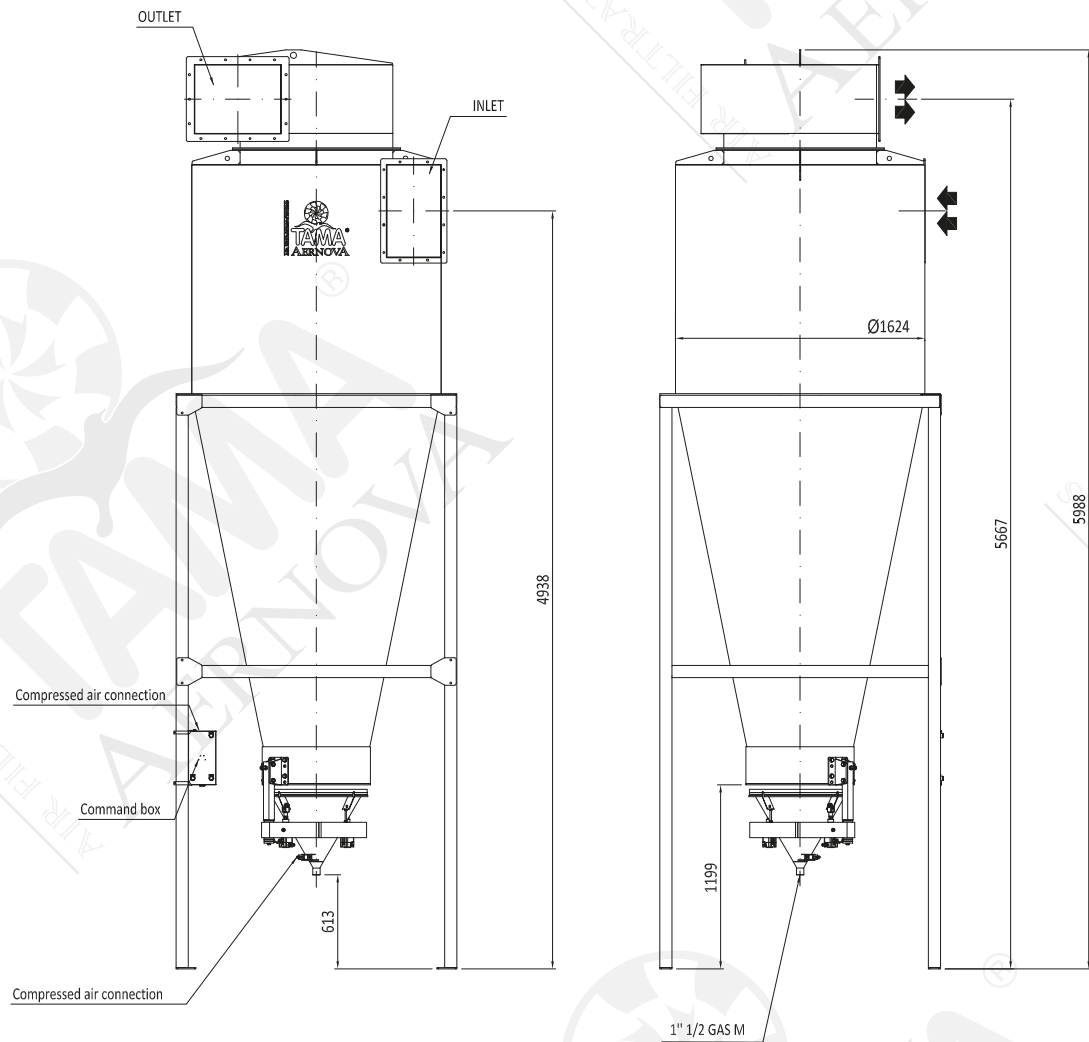

INLET FLANGE DETAIL



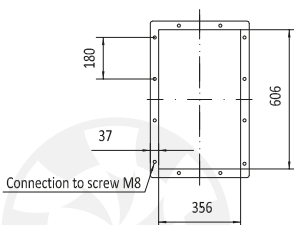


OUTLET FLANGE DETAIL

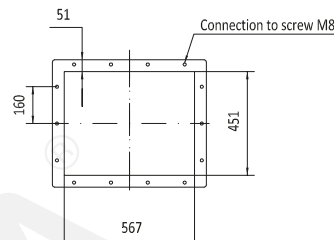


TECHNICAL SPECIFICATIONS			
ITEM CODE	V-AREN 1600		
Weight	kg	1080	
Max working negative pressure	Pa	5000	
Pneumatic feeding (ISO Class 2.4.1 according 8573-1:2010)	mm	8	
Max level of compressed air	bar	4	
PERFORMANCE CHARACTERISTICS			
Nominal air flow	m <sup>3</sup> /h	20000	
Pressure drop*	Pa	1430	
Efficiency*	%	96.5	

\* Efficiency and pressure drop were calculated by reference to a typical polyester powder used for coating of steel

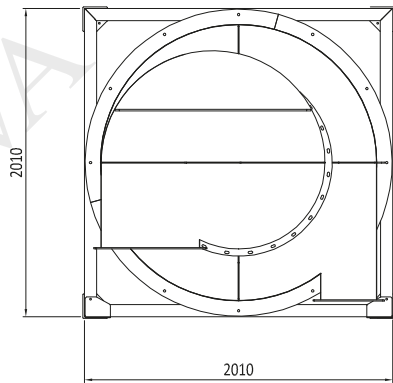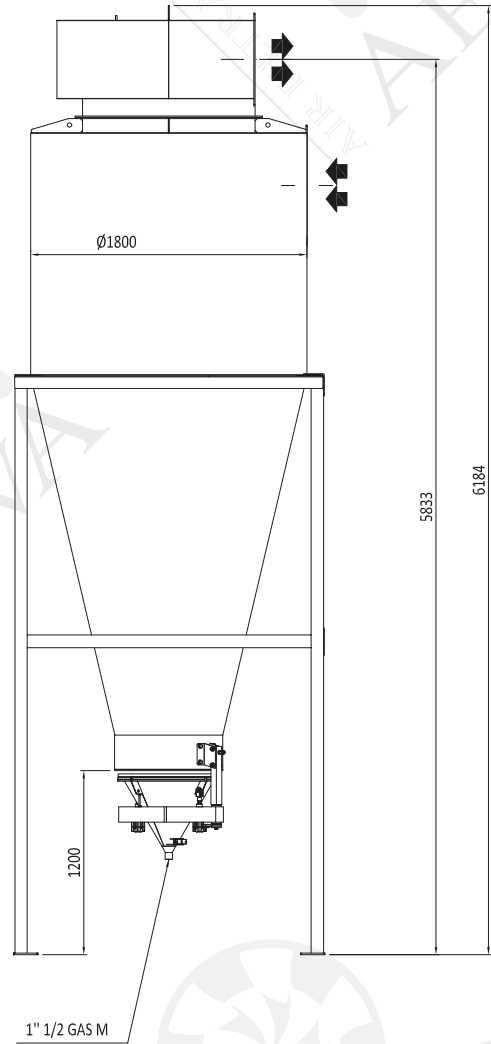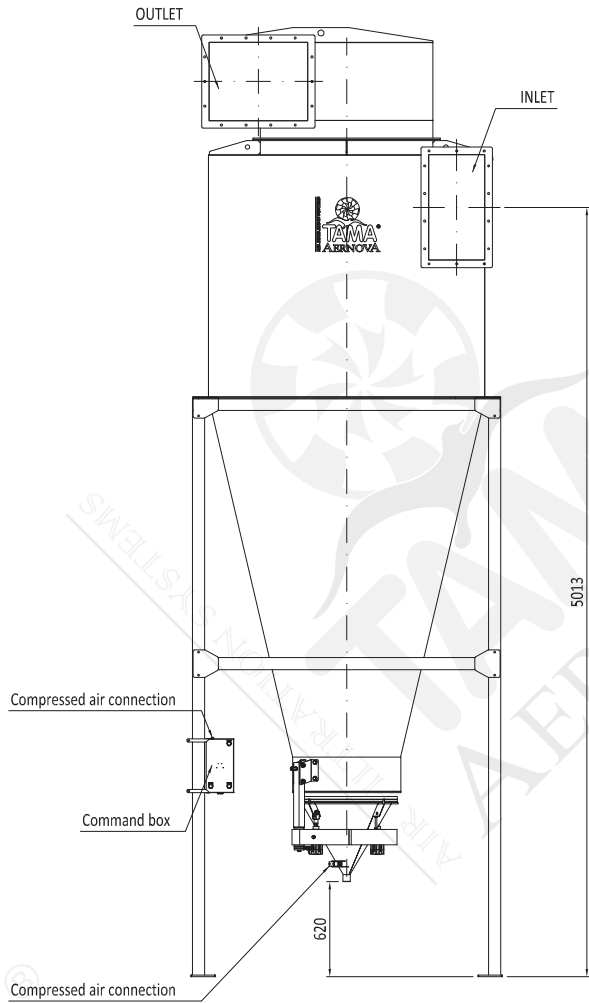




INLET FLANGE DETAIL

OUTLET FLANGE DETAIL

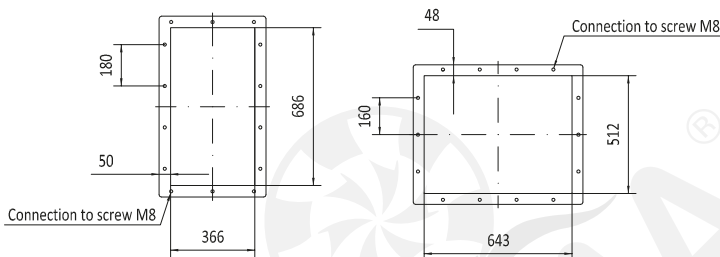


TECHNICAL SPECIFICATIONS		
ITEM CODE	V-AREN 1800	
Weight	kg	1170
Max working negative pressure	Pa	5000
Pneumatic feeding (ISO Class 2.4.1 according 8573-1:2010)	mm	8
Max level of compressed air	bar	4
PERFORMANCE CHARACTERISTICS		
Nominal air flow	m <sup>3</sup> /h	24000
Pressure drop*	Pa	1382
Efficiency*	%	96.2


\* Efficiency and pressure drop were calculated by reference to a typical polyester powder used for coating of steel

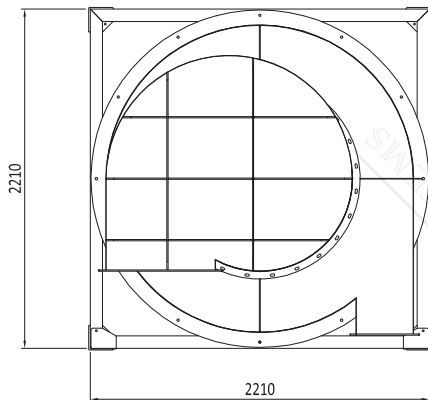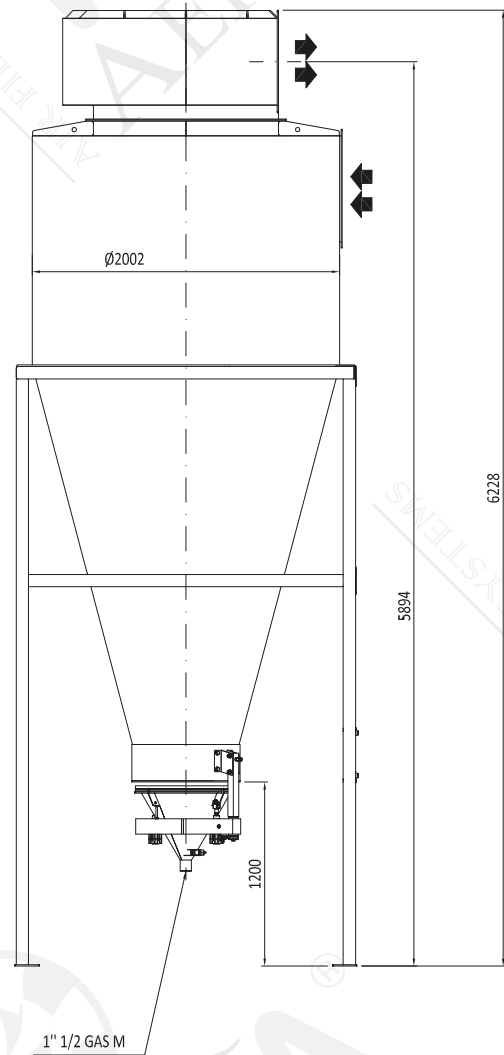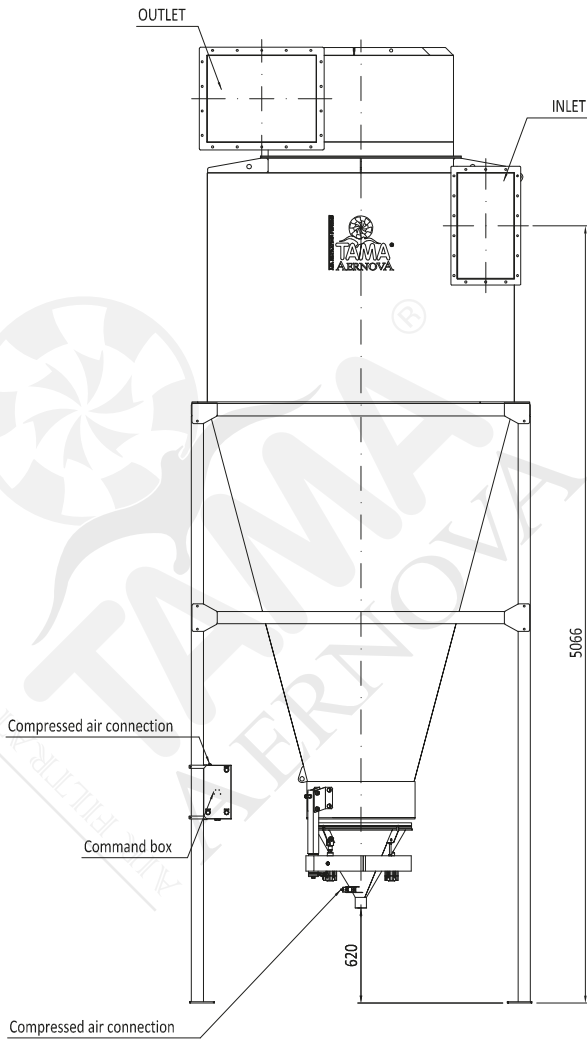

INLET FLANGE DETAIL

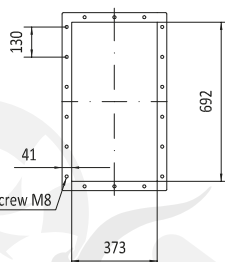




OUTLET FLANGE DETAIL

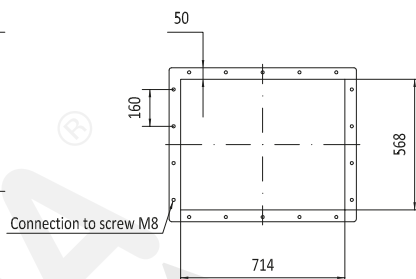

TECHNICAL SPECIFICATIONS



ITEM CODE	V-AREN 2000		
Weight	kg		1360
Max working negative pressure	Pa		5000
Pneumatic feeding (ISO Class 2.4.1 according 8573-1:2010)	mm		8
Max level of compressed air	bar		4
PERFORMANCE CHARACTERISTICS			
Nominal air flow	m <sup>3</sup> /h		28000
Pressure drop*	Pa		1620
Efficiency*	%		96.3

\* Efficiency and pressure drop were calculated by reference to a typical polyester powder used for coating of steel

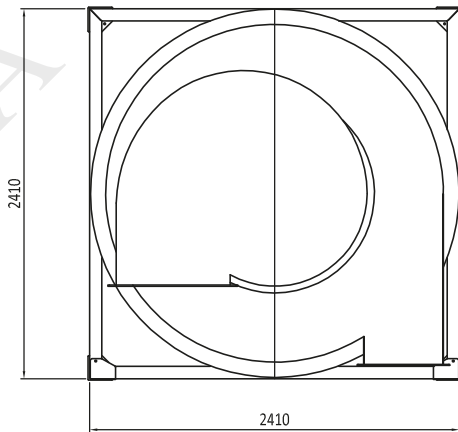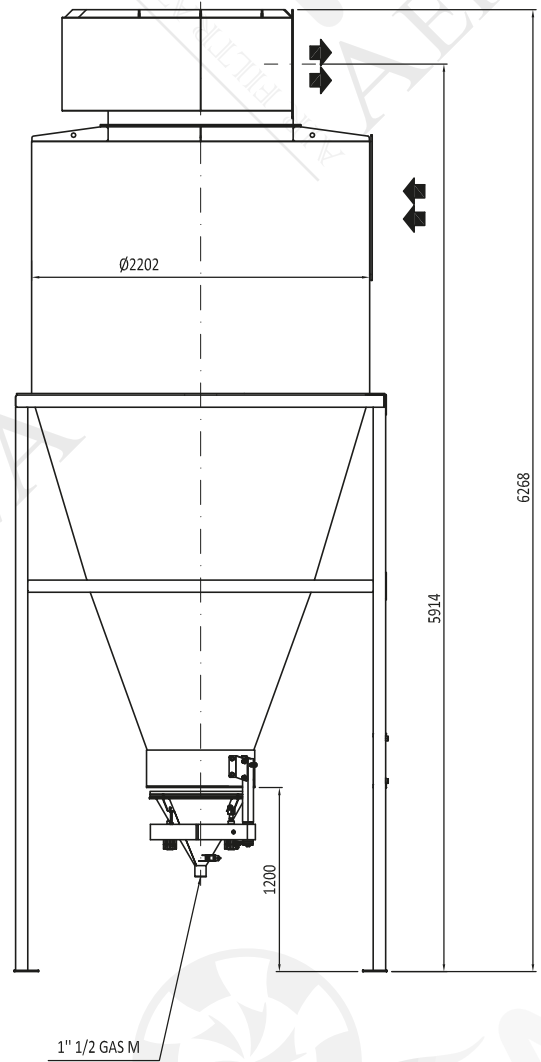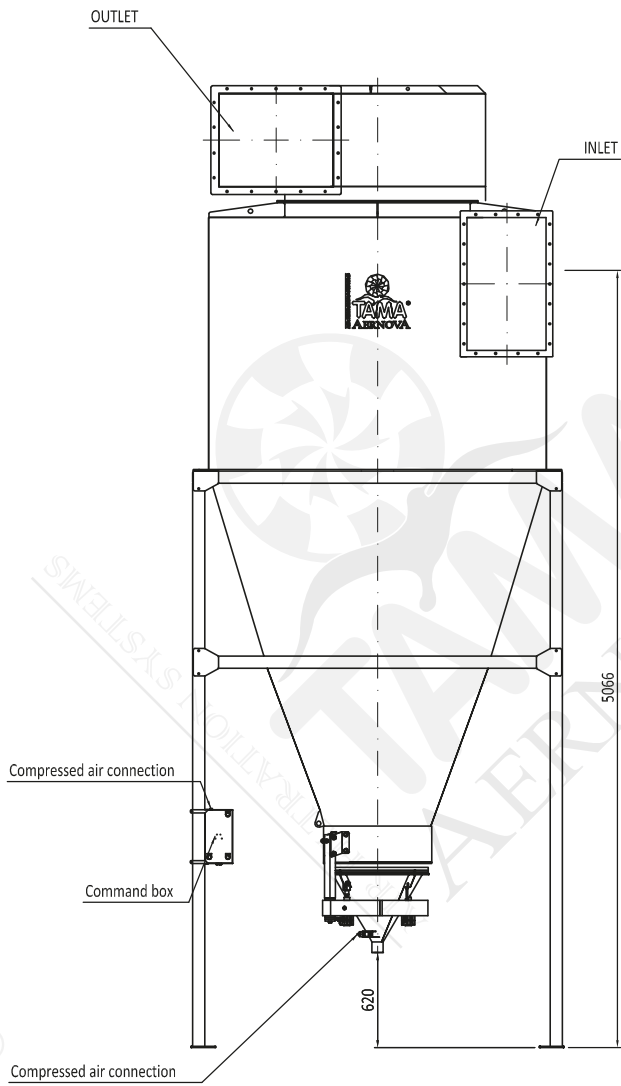

INLET FLANGE DETAIL

OUTLET FLANGE DETAIL

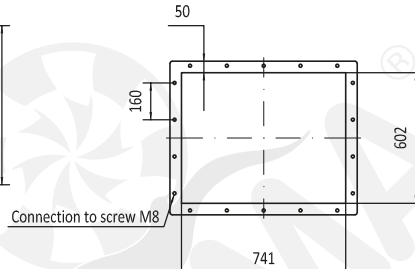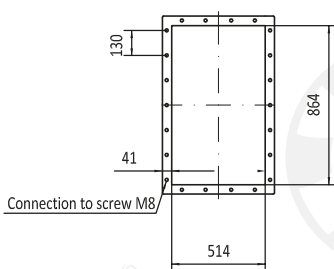

TECHNICAL SPECIFICATIONS		
ITEM CODE	V-AREN 2200	
Weight	kg	-
Max working negative pressure	Pa	5000
Pneumatic feeding (ISO Class 2.4.1 according 8573-1:2010)	mm	8
Max level of compressed air	bar	4
PERFORMANCE CHARACTERISTICS		
Nominal air flow	m <sup>3</sup> /h	32000
Pressure drop*	Pa	1200
Efficiency*	%	94

\* Efficiency and pressure drop were calculated by reference to a typical polyester powder used for coating of steel