
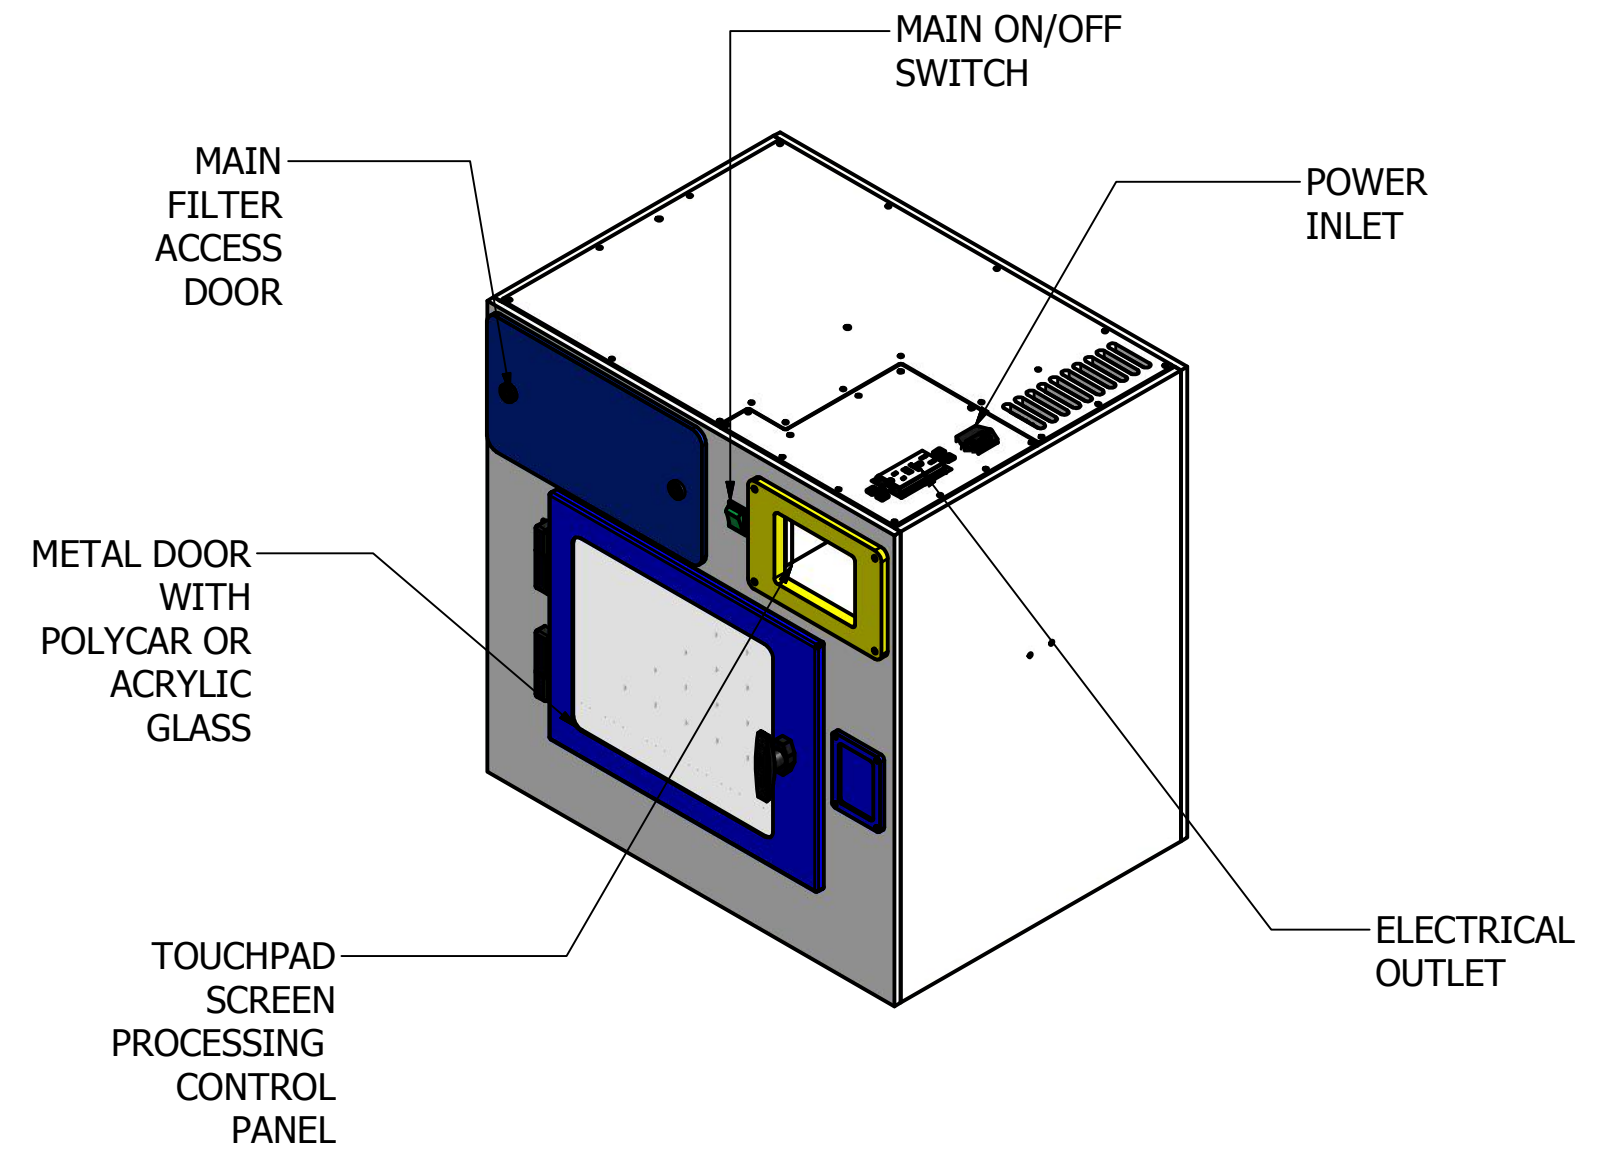
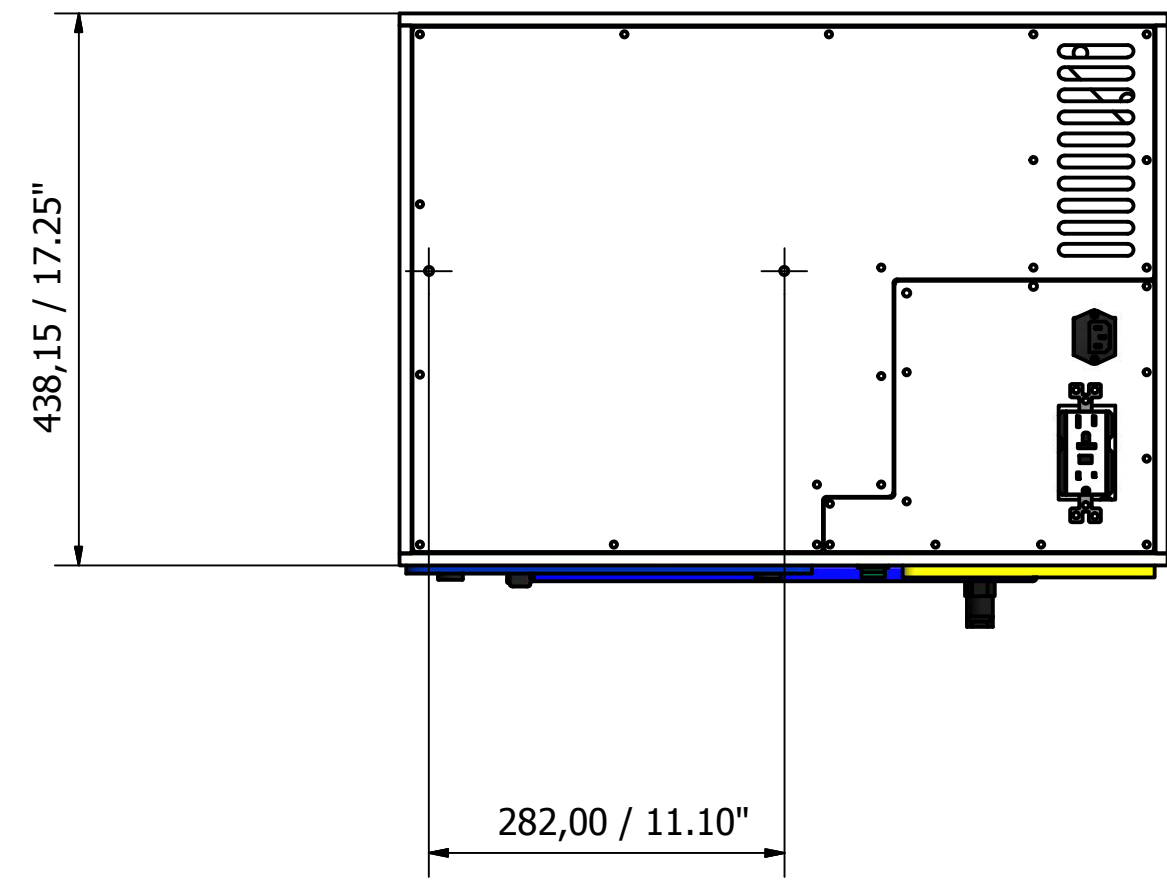
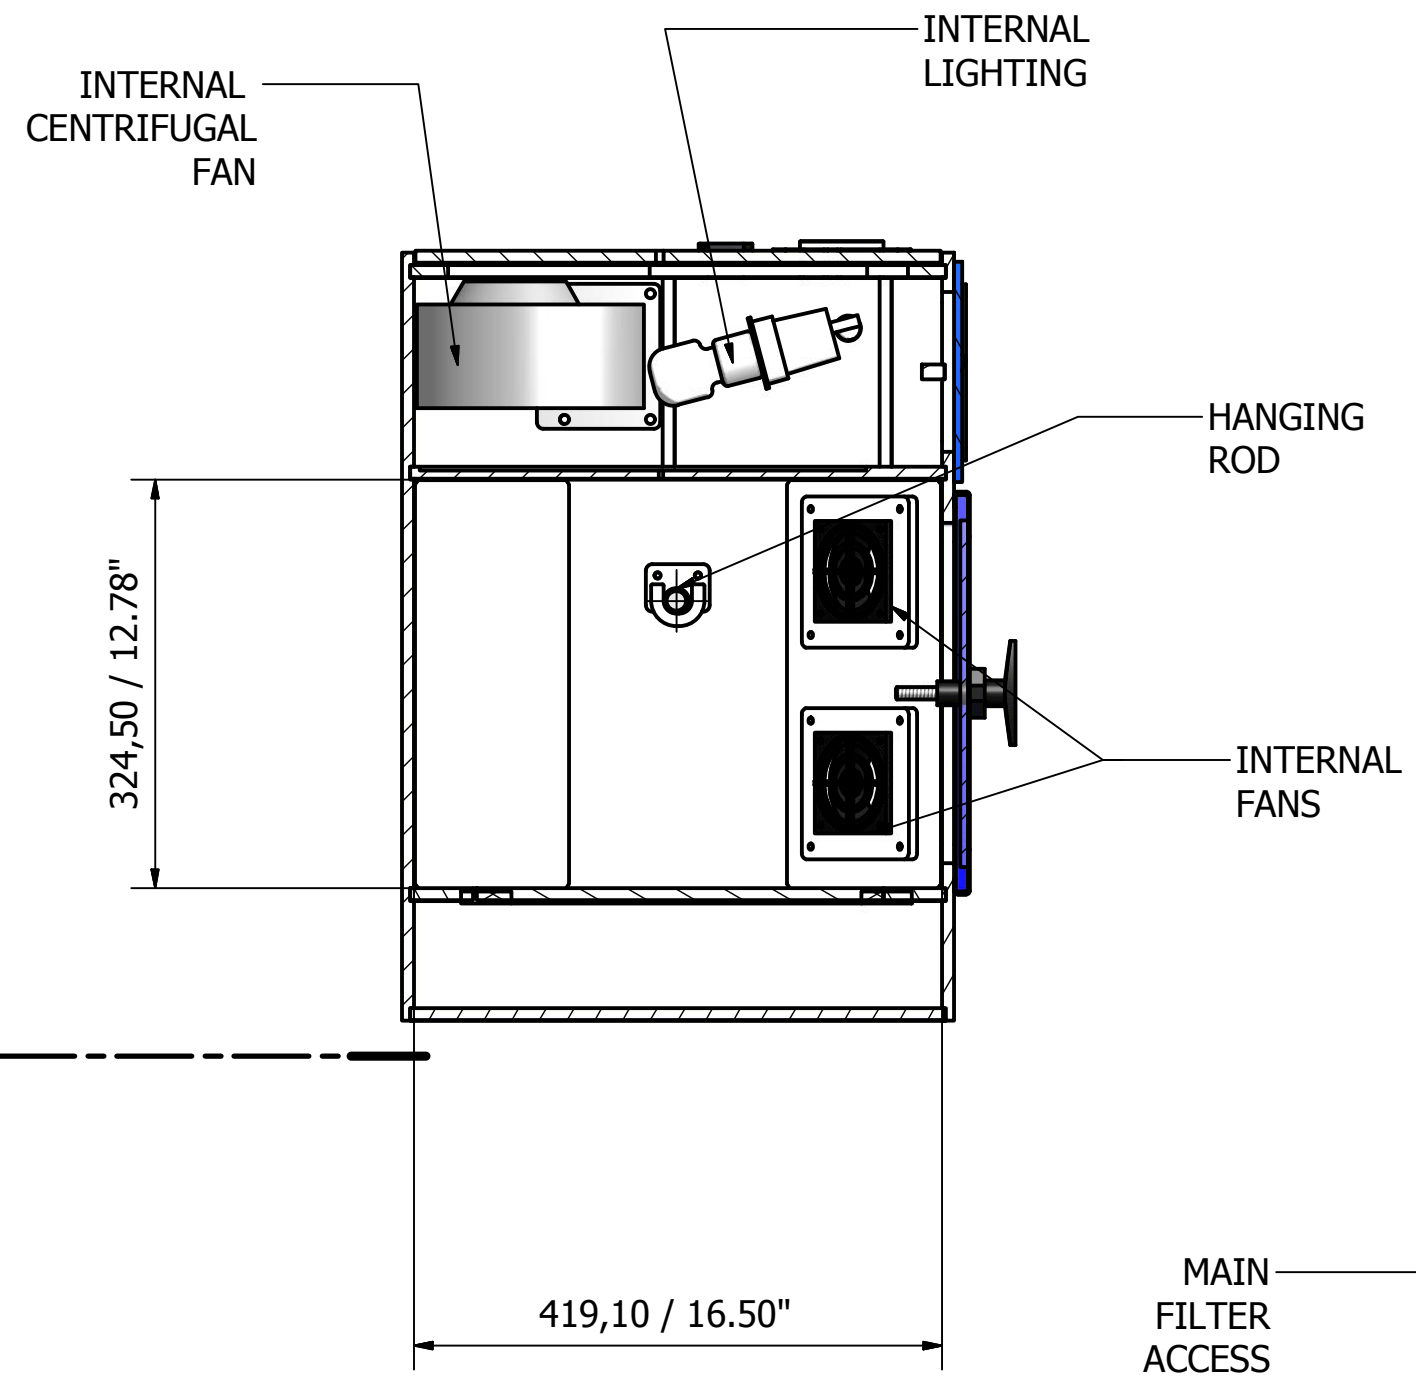


REVISION HISTORY				
ZONE	REV	DESCRIPTION	DATE	APPROVED
BOTTOM SHELVES	1	POWER CONNECTION	6/07/2014	P CH
WORK SURFACE	2	PC-HUMIDIFIER	7/14/2015	P CH
WORK SURFACE	3	HONEYWELL HUMIDIFIER	1/04/2016	P CH

SAFEFUME AUTOMATIC CYANOACRYLATE FUMING CHAMBER

- NOTES :
- 1.0 CUSTOMER:
 - 2.0 SUBMIT DRAWINGS FOR APPROVAL.
 - 3.0 STANDARD FEATURES INCLUDE:
 - 3.1 CABINET BUILT WITH 3/8" WHITE POLYPROPYLENE SEAMLESS, NON-POROUS WATERTIGHT INSIDE, THERMALLY FUSE.
 - 3.2 FRONT METAL DOOR WITH POLYCARONATE OR ACRYLIC GLASS.
 - 3.3 CARBON MAIN FILTER.
 - 3.4 POWER SUPPLY 120 V 60 HZ.
 - 3.5 HOT PLATE ACCELERATOR.
 - 3.6 NEBULIZER / HUMIDIFIER.
 - 3.7 STANDARD ACCESSORIES APPLIED.
 - 3.8 MICROPROCESSOR SCREEN TOUCH PAD CONTROL PANEL.
 - 4.0 W/O

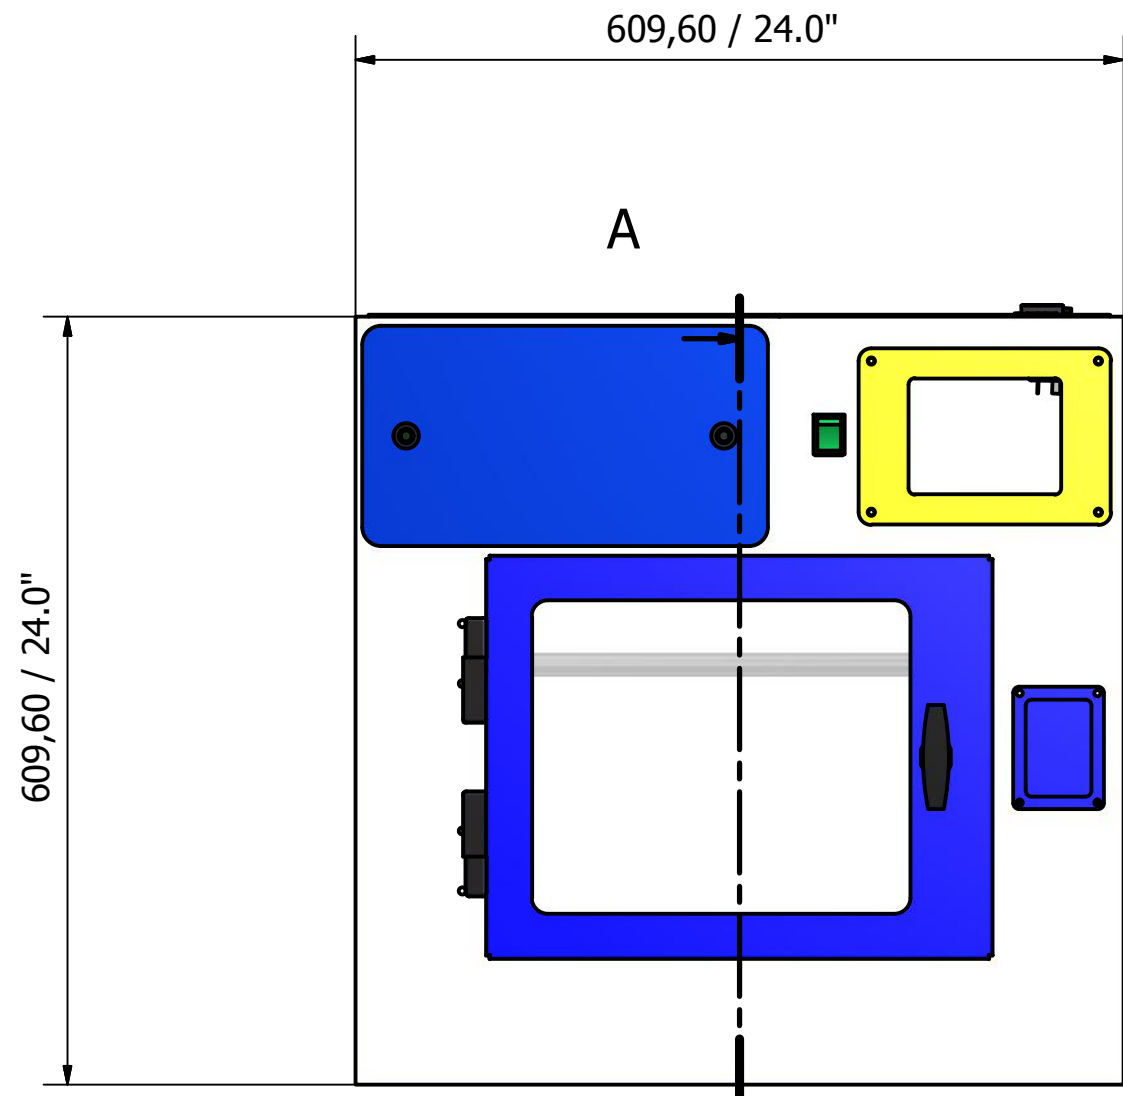

A-A (1 : 6)

Designed by CFG	Checked by	Approved by	Date 10/15/2008	Date
AIR SCIENCE USA		CA24-17.25Dx24H FUMMING CHAMBER		
		CA24.AssemblyBody	Edition 3	Sheet 1 / 1