

Membrane dryers

DMD | DMM - SERIES

BENEFITS AND FEATURES

- Multifunctional applications, no electrical connection needed
- No moving parts
- No liquid condensate to be treated
- No oxygen loss
- DMD: Light construction,
DMM: Pressure-resistant aluminium housing

The DMD and DMM Deltech membranes are an excellent alternative to refrigerant and adsorption dryers. Membrane dryers can be selected independently from the desired pressure dew point and need no maintenance. In order to protect the delicate membrane surface, particle and oil-fine filtration are required.

The appropriate filter combinations are available in our Deltech filter program.

The purge air, saturated with water vapour is dispersed freely in the environment without any noise and without the need for a condensate treatment.

Membrane dryers are specially suitable as point-of-use dryers or in areas where there is no electrical power supply available. Due to the dew point suppression, membranes provide in combination with refrigerant dryers extreme low pressure dew points.

Membrane dryers make use of a small quantity of compressed air as purge air. The quantity of purge air depends, among others, on



DMD



DMM



Option: Purge stop valve
(not as retrofit-kit available)

the desired pressure dew point. In the model DMM, the membrane bundle is located in a pressure-resistant housing. This construction offers the possibility to interrupt the purge air flow by means of an optionally-mounted solenoid valve, which can be operated from the compressor on-off contact.

Design Data	Min.	Nom.	Max.
Inlet pressure	4 bar (g)	7 bar (g)	14 bar (g)
Inlet temperature	+5 °C	+35 °C	+66 °C
Pressure dew point	-40 °C	+3 °C	+10 °C


Purge air consumption* for PDP:	+3°C	-10°C	-20°C	-40°C
Consumption approx. %	15	17	22	35

* At design conditions

Model	Flow Inlet	Flow Outlet	Connection	Ø	Length	Weight	Pre-filter combination
	m³/h			mm		kg	PF/HF
DMD 20.1	2.6	2.3	R 3/8"	62	311	0.6	F02-B-PF/HF
DMD 20.2	10.1	8.8			670	0.8	
DMD 20.3	16.1	14.0			387	2.2	
DMD 20.4	34.8	30.5	R 1/2"	107	683	3.1	
DMD 20.5	57.8	50.6			1,041	4.3	
DMD 20.6	112.8	98.7	R 3/4"	133	1,045	6.6	F06-B-PF/HF

DMM 1	2.4	2.0	R 3/8"	105	298	2.5	F02-B-PF/HF
DMM 2	7.9	6.8			400	2.8	
DMM 3	16.4	13.9	R 1/2"	105	502	3.0	
DMM 4	24.0	20.7			702	3.6	
DMM 5	42.0	35.8	R 3/4"	133	514	4.9	
DMM 6	70.2	60.6			711	6.2	F04-B-PF/HF
DMM 7	117.0	99.0	R 1"	164	762	7.6	F06-B-PF/HF
DMM 8	186.0	158.0			876	15.9	F07-B-PF/HF
DMM 9	240.0	205.0			1,035	18.1	F08-B-PF/HF

* ISO 7183, based on the intake volume of the compressor at +20°C and 1 bar (a), operating pressure 7 bar (g), inlet temperature +35°C, ambient or cooling water temperature +25°C, pressure dew point +3°C
The technical data are for the dryers without filters. **Important:** Use Membrane Dryers only with the recommended inlet filters.
Technical data and specification are subject to change without prior notice

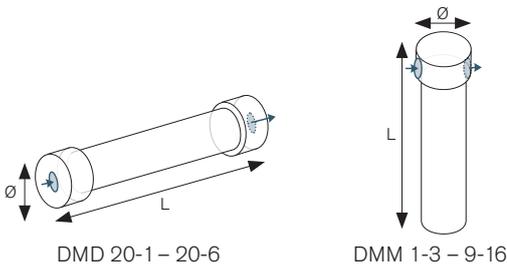

The following correction factors need to be used to select the correct unit for other operating conditions.

Correction factors ¹ for different operating pressure in bar(g) (F ₁)							
bar (g)	4	6	7	8	9	10	11 – 14
DMD 20.1 - 20.6 DMM 1 - 9	0.4	0.8	1	1.2	1.4	1.7	on request

Correction factors ¹ for different inlet temperature in °C (F ₂)							
°C	+5	+25	+35	+40	+50	higher temp. on request	
DMD 20.1 - 20.6 DMM 1 - 9	1.7	1.2	1	0.9	0.8		

Correction factors ¹ for different outlet pressure dew point (F ₃)					
°C	-40	-30	-10	+3	+10
DMD 20.1 - 20.6 DMM 1 - 9	0.4	0.5	0.7	1	1.1

Selection example	Calculation
Compressor capacity (V ₁)	$V_2 = \frac{V_1}{F_1 \cdot F_2 \cdot F_3} = \frac{100}{1.2 \cdot 1.2 \cdot 1} = 69.4 \text{ m}^3/\text{h}$
Inlet pressure (F ₁)	
Inlet temperature (F ₂)	
Pressure dew point (F ₃)	
V ₂	
	Selection: DMD 20.6 / DMM 6

¹ These data are approximate and may slightly vary from model to model.

SPXFLOW



SPX Flow Technology Germany GmbH
Konrad-Zuse-Straße 25 | D-47445 Moers
Tel.: +49 (0) 28 41 / 8 19-0 | Fax: +49 (0) 28 41 / 8 19 83
E-Mail: info@spx-deltech.de
www.spx-deltech.de | www.spxflow.com

SPX FLOW, Inc. reserves the right to incorporate our latest design and material changes without notice or obligation.

Design features, materials of construction and dimensional data, as described in this bulletin, are provided for your information only and should not be relied upon unless confirmed in writing. Please contact your local sales representative for product availability in your region. For more information visit www.spxflow.com.

The green 'S' and 'X' are trademarks of SPX FLOW, Inc.