



Laser light sensor VLE350-F280-B12-1100

- Height profile output
- Area image output
- Resolution 1280 x 960 pixel
- Intelligent exposure time control
- Laser class 1, eyesafe


Laser light sensor for profile matching; Resolution: 1280 x 960 Pixel; Measuring range: X = 40 ... 160 mm, Z = 60 ... 350 mm; Scan rate: 30 s-1; Ethernet TCP/IP interface



Function

The SmartRunner Explorer is based on the innovative SmartRunner technology and outputs both height profiles and area images. SmartRunner technology combines the light-sectioning method for acquiring height profiles with the acquisition of area images via the integrated area illumination. In the light section method, a laser line is projected onto an object. This is captured at a specific angle by a camera. A height profile is then created using the triangulation principle. This laser technology enables reliable height profile recording on different surfaces.

Dimensions

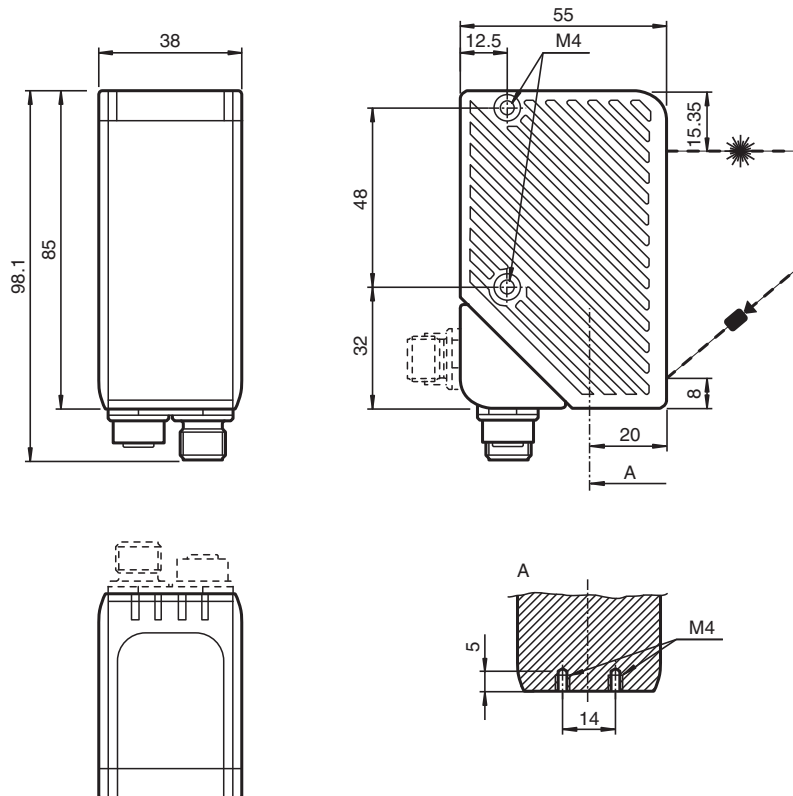

Release date: 2022-10-24 Date of issue: 2022-10-24 Filename: 284586-100008_eng.pdf

Refer to "General Notes Relating to Pepperl+Fuchs Product Information".

Pepperl+Fuchs Group
www.pepperl-fuchs.com

USA: +1 330 486 0001
fa-info@us.pepperl-fuchs.com

Germany: +49 621 776 1111
fa-info@de.pepperl-fuchs.com

Singapore: +65 6779 9091
fa-info@sg.pepperl-fuchs.com

pf PEPPERL+FUCHS

Technical Data

General specifications		
Measurement range	X = 40 ... 160 mm ; Z = 60 ... 350 mm	
Light source	laser diode	
Light type	red laser + Integrated LED lightning red 650 nm	
Laser nominal ratings		
Note	VISIBLE LASER RADIATION , DO NOT STARE INTO BEAM DO NOT VIEW DIRECTLY WITH OPTICAL INSTRUMENTS	
Laser class	1	
Wave length	Measuring laser: 660 nm	
Pulse length	Measuring laser: 0.5 ms	
Maximum optical power output	Measuring laser: 15 mW	
Laser monitoring	The safety system switches off the laser when the laser current is too high	
Scan rate	30 s ⁻¹	
Resolution	X>0.075 mm; Z>0.1 mm at 60 mm distance X>0.12 mm; Z>0.6 mm at 200 distance X>0.25 mm; Z>1.3 mm at 350 distance	
Nominal ratings		
Camera		
Number of pixels	1280 x 960 pixels	
Functional safety related parameters		
MTTF _d	20 a	
Mission Time (T _M)	10 a	
Diagnostic Coverage (DC)	0 %	
Indicators/operating means		
Operation indicator	LED green	
Diagnostics indicator	LED yellow / red	
Function indicator	Trigger: LED yellow	
Control elements	2 push-buttons	
Electrical specifications		
Operating voltage	U _B	24 V ± 20 % , PELV
No-load supply current	I ₀	max. 250 mA
Power consumption	P ₀	max. 6 W , Outputs without load
Interface		
Interface type	Ethernet	
Protocol	TCP/IP	
Transfer rate	100 MBit/s	
Input		
Input voltage	24 V	
Number/Type	External triggering	
Switching threshold	low: < 2.5 V, high: > 8 V	
Compliance with standards and directives		
Standard conformity		
Noise immunity	EN 61000-6-2:2005	
Emitted interference	EN 61000-6-4:2007/A1:2011	
Degree of protection	EN 60529	
Shock and impact resistance	EN 60068-2-27:2009	
Laser class	IEC 60825-1:2007	
Approvals and certificates		
CCC approval	CCC approval / marking not required for products rated ≤36 V	
Approvals	CE	
Ambient conditions		
Operating temperature	-20 ... 45 °C (-4 ... 113 °F) , (noncondensing; prevent icing on the lens!)	
Storage temperature	-20 ... 70 °C (-4 ... 158 °F)	

Release date: 2022-10-24 Date of issue: 2022-10-24 Filename: 284586-100008_eng.pdf

Technical Data

Mechanical specifications	
Housing width	38 mm
Housing height	85 mm
Housing depth	55 mm
Degree of protection	IP67
Connection	8-pin, M12 x 1 connector (supply + Inputs/Outputs) + 4-pin, M12x1 socket, D-coded (LAN) ; can be rotated 90° ; Grounding : Grounding clip for PCV system
Material	
Housing	PC/ABS
Optical face	Plastic pane
Mass	approx. 125 g
Tightening torque, fastening screws	max. 2 Nm
General information	
Note	Security Instructions: <ul style="list-style-type: none"> - Read the operating instructions before attempting commissioning - Installation, connection and adjustments should only be undertaken by specialist personnel - Not a safety component in accordance with the EU Machinery Directive

Connection Assignment

Pin	Signal	Pin	Signal
1	IN Trigger	1	TX+ Ethernet
2	+UB	2	RX+ Ethernet
3	n.c.	3	TX- Ethernet
4	n.c.	4	RX- Ethernet
5	n.c.		
6	n.c.		
7	GND		
8	n.c.		






Assembly

1	READY	green/red
2	POWER	green
3	RESULT	-
4	TRIGGER	yellow
5	n.c.	-
6	n.c.	-
7	LINK	green
8	RX/TX	yellow

Accessories


	V19-G-5M-PUR-ABG	Female cordset single-ended M12 straight A-coded, 8-pin, PUR cable grey, shielded
	VLX-MB2	Mounting bracket

Accessories

	VLX-MB1	Mounting bracket
	V19-G-2M-PUR-ABG	Female cordset single-ended M12 straight A-coded, 8-pin, PUR cable grey, shielded
	V1SD-G-2M-PUR-ABG-V45-G	Connection cable, M12 to RJ-45, PUR cable 4-pin, CAT5e
	VLX-F280-C	Weld slag cover model
	VLX-F280-C-GLASS	Replacement glass for SmartRunner protective housing

Installation Conditions

Measuring range

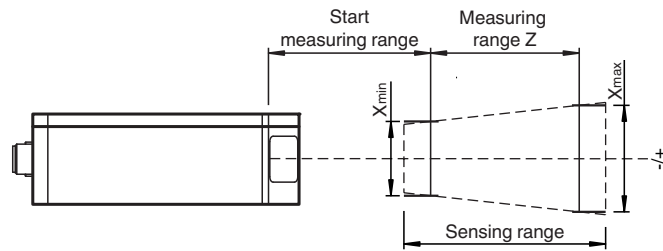

Safety Information



**LASERLICHT
LASER LIGHT**

**LASER KLASSE 1
CLASS 1 LASER PRODUCT**

Safety Information

Laser Class 1 Information

The irradiation can lead to irritation especially in a dark environment. Do not point at people!

Maintenance and repairs should only be carried out by authorized service personnel!

Attach the device so that the warning is clearly visible and readable.

The warning accompanies the device and should be attached in immediate proximity to the device.

Caution – Use of controls or adjustments or performance of procedures other than those specified herein may result in hazardous radiation exposure.