

# Uniblitz® DSS10B

## 10mm Bi-Stable Laser Shutter

### Overview

The Uniblitz DSS10B is a 10mm bi-stable laser shutter with an extremely low-profile construction. Its lack of an external protruding actuator makes it very slim and flexible for system integration. The inherent reliability of the DSS10B comes from the fact that it contains only two moving parts: the drive ring and the blades. It is guaranteed to operate for 2,000,000 operations. Bi-stable shutter devices, like the DSS10B, require no power to hold the blades in either the open or closed state.

### Key Features

- 10mm aperture
- **2,000,000 actuation guarantee**
- Configured for the [VED24 Shutter Driver](#)
- **RoHS Compliant**
- Transfer time on opening:  
5.0 milliseconds
- Transfer time on closing:  
5.0 milliseconds

### Specifications

#### Electrical Specifications

Coil resistance	8 OHMS
Voltage to Open <sup>1</sup>	+10.7 VDC
Hold Voltage (Nominal)	N/A

#### Mechanical Specifications

Weight	4.7 g
Operating Temp.	-10 - +65 °C
Max. Opening Bounce	15%
Max. Closing Bounce	5%
Max. Freq. of Operation <sup>2</sup>	5 Hz / 20 Hz
Number of Shutter Blades	4

<sup>1</sup> Peak voltage as provided by the VED24 Driver.

<sup>2</sup> (Continuous/Burst) Continuous frequency rating specified at shutter's minimum exposure pulse. Burst frequency rating specified for four (4) seconds maximum with one (1) minute minimum between bursts.




**Need Support?** Please visit our website or email us at [info@uniblitz.com](mailto:info@uniblitz.com).

Tel: +1 585-385-5930 | Fax: 585-385-6004 | 803 Linden Ave. Rochester, NY 14625

Updated 6/24 | Document Version 6.1 | ©2024 Vincent Associates

## Shutter Timing Data

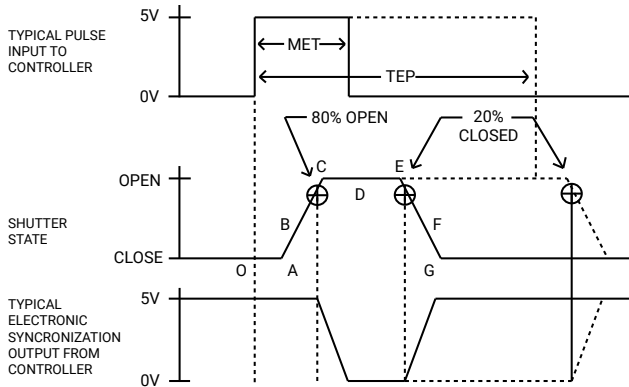

<sup>1</sup> Under no circumstances should any type of lubricant be applied to the shutter blade area. Lubricating the shutter blades will likely slow the shutter down and may eventually render it inoperable.

### DSS10B (w/ VED24 and "T" blades) <sup>1</sup>

### Time (msec.)

<b>O - A</b>	Delay time on opening after current applied	3.6
<b>A - C</b>	Transfer time on opening	5.0
<b>O - C</b>	Total opening time	8.6
<b>C - E</b>	Min. dwell time with min. input pulse	5.0
<b>B - F</b>	Min. equivalent exp. time	3.6
<b>D - E</b>	Delay time on closing after current applied	10.0
<b>E - G</b>	Transfer time on closing	5.0
<b>A - G</b>	Total window time	15.0
<b>MET</b>	Min. exposure time	15.0
<b>TEP</b>	Typical exposure pulse	>15.0

## Product Options

DSS10B **2** **3** **4** **5**

Ex: DSS10B1T0L

### 1 Shutter Series:

DSS10B

### 2 Housing:

1: Un-Housed

### 3 Blades: <sup>2</sup>

T: Low Energy (Teflon®)

ZM: High Energy (AlMgF<sub>2</sub>) <sup>3</sup>

### 4 Electronic Sync:

0: Omitted

### 5 Connector:

L: 2 wire bare leads attached to a 4" flex connector

Leave blank for 2-pin JST connector

<sup>2</sup> Other blade coating options may be available by special order.

<sup>3</sup> Input side only; Teflon® coating is on opposite side to protect shutter blade surface. Light source must be input to the reflective side only.

# Uniblitz® DSS10B Technical Drawings

## Shutter Layout

