

# APS 113 ELECTRO-SEIS®

## Long Stroke Shaker with Linear Ball Bearings



The **APS 113 ELECTRO-SEIS®** shaker is a long stroke, electrodynamic force generator specifically designed to be used alone or in arrays for studying dynamic response characteristics of various structures. It finds use in modal excitation of complex structures, particularly when low frequencies are required. Furthermore it can be used for low frequency vibration testing of components and assemblies.

### Applications

- Determination of natural mode frequencies, shapes, damping ratios, and stress distributions
- Excitation of manufactured equipment in the factory or installed in the field to demonstrate compliance with seismic specification criteria
- Seismic simulation for components
- Test and calibration for seismic instruments
- Geological Services, Science, Physics and Seismic

### Features

- Can be used to generate sine wave, swept sine wave, random or impulse force waveforms, fully adjustable at source
- Test set-up flexibility - operates fixed body, free body, free armature
- Optimized to deliver power to resonant load with minimum shaker weight and drive power
- Adjustable armature re-centering for horizontal and vertical operation or other external pre-loads
- Rugged standard armature and linear guidance system carries full weight of body
- One-Man Portability - 36 kg (80 lb) total weight

# APS 113 ELECTRO-SEIS®

## Long Stroke Shaker with Linear Ball Bearings

### Description and Characteristics

The APS 113 ELECTRO-SEIS® shaker has been optimized for driving structures at their natural resonance frequencies. It is an electrodynamic force generator, the output of which is directly proportional to the instantaneous value of the current applied to it, independent of frequency and load response. It can deliver random or transient as well as sinusoidal waveforms of force to the load. The armature has been designed for minimum mass loading of the drive point. The ample armature stroke allows driving antinodes of large structures at low frequencies and permits rated force at low frequencies when operating in a free body mode.

The unit employs permanent magnets and is configured such that the armature coil remains in a uniform magnetic field over the entire stroke range - assuring force linearity. The enclosed, self-cooled construction provides safety and minimum maintenance. Attachment of the armature to the drive point is accomplished by a simple thrust rod like the APS 8610 - Modal Stinger.

An amplifier, such as the APS 125 - Power Amplifier, is required to provide armature drive power.

The drive coil is wound in a manner which allows series or parallel connection, offering the user the choice of standard or low impedance. This option is required if the shaker is to be used with the APS 125 - Power Amplifier for extended frequency range or random noise excitation.

### Modes of Operation

#### Free Armature Mode

In this mode, the armature provides the reaction mass for force delivered to the test structure via the shaker body. Auxiliary reaction mass may be added to the armature to decrease the low frequency limit for rated force operation.

The APS 113 shaker and APS 0112 - Reaction Mass may be used in a vertical or horizontal free armature mode with rated force down to 2 Hz. Feet and carrying handles are provided for ease in placement of the shaker on horizontal test surfaces.



APS 113 with APS 0112 - Reaction Mass Assembly and APS 0414 - Lifting Handles



APS 113 with APS 0112 Reaction Mass Assembly

#### Fixed Body Mode

By providing a rigid attachment between the body and ground, the full relative velocity and stroke capability is available for load motion. Maximum rated force can be delivered down to 0.01 Hz and 70% maximum to 0 Hz.

# APS 113 ELECTRO-SEIS®

## Long Stroke Shaker with Linear Ball Bearings



APS 113 with APS 0108 - Carrying Handles and Tie-down Bars and APS 8610 - Modal Stinger prepared for Fixed Body Mode operation

surfaces include floors, roofs, platforms, cabinets, bridges and tanks.

### Shaker Table Mode


Auxiliary tables are available which attach directly to the armature and enable the basic shaker to provide long stroke, low frequency excitation to components or model structures mounted on the tables. APS 0052 - Auxiliary Table provides a 10 in x 10 in horizontal load mounting surface for horizontal motion rated for 23 kg (50 lb) test loads. The APS 0077 - Auxiliary Table provides the same load mounting surface for vertical motion. The APS 0078 provides for both vertical and horizontal applications.



APS 113 with APS 0052 - Auxiliary Table Kit - Horizontal

### Free Body Mode

In this mode, the body provides the reaction mass. Load and body motion are accommodated within the total relative velocity and stroke. Because of the high cross-axis stiffness provided by the armature linear guidance system, the shaker may be supported above ground level by means of suspension lines (APS 8611 - Steel Cable Kit) attached to the body. This provides a convenient mounting for introducing force parallel to a horizontal mounting surface. Examples of such

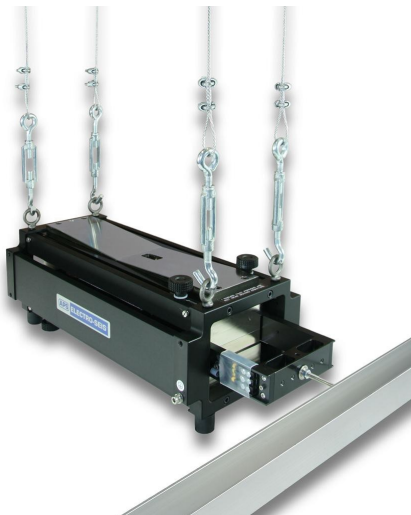

APS 113 with APS 8610 - Modal Stinger and APS 8611 - Steel Cable Kit prepared for Free Body Mode operation



APS 113 with APS 0077 - Auxiliary Table Kit - Vertical

### Performance

One application of the APS 113 ELECTRO-SEIS® shaker is to determine the dynamic characteristics of mechanical structures. At resonance, a large amount of energy is contained in the structure, and the shaker must accommodate the resulting motion. However, it need only supply the real mechanical power dissipated by damping mechanisms within the structure.




If a drive point on a structure in resonance is vibrating with a velocity of 1,000 mm/s (39 in/s) peak and a force of 133 N (30 lbf) peak is required to sustain the vibration level, then the shaker will be delivering approximately 65 W RMS to the structure. Such a load on the shaker is termed a matched resonant load, and it is purely resistive since the force is in a phase with the velocity.

If the resonant load input is other than 133 N x 1,000 mm/s, the full 65 W of mechanical power cannot be delivered to the structure, the system being either force or velocity limited. If the resulting maximum response level is not great enough, the user may have the option of moving the shaker to a drive point having an impedance closer to the matched value, or adding more shakers to the array driving the structure.

Within the limitations of maximum force and velocity, the actual power delivered to a structure is a function of the input mechanical impedance at the drive point. In typical modal testing, this input impedance varies widely in magnitude and phase angle. At different frequencies, the input impedance of the drive point may appear predominately spring-like, mass-like, or resistive. Since the object of the tests is to establish resonant modes, at which the input mechanical impedance of all drive points are resistive, the shaker's maximum performance capability is most meaningful stated in terms of the force and velocity that can be obtained when driving a matched resistive load.

Therefore performance is given in the form of graphs which present the envelopes of maximum force and velocity delivered to a resonant structure as functions of the resonance frequency of the structure.

Another application is the excitation for sensor calibration. Acceleration performance of the APS 113 ELECTRO-SEIS® shaker with various mass loads is shown in the lower graph.

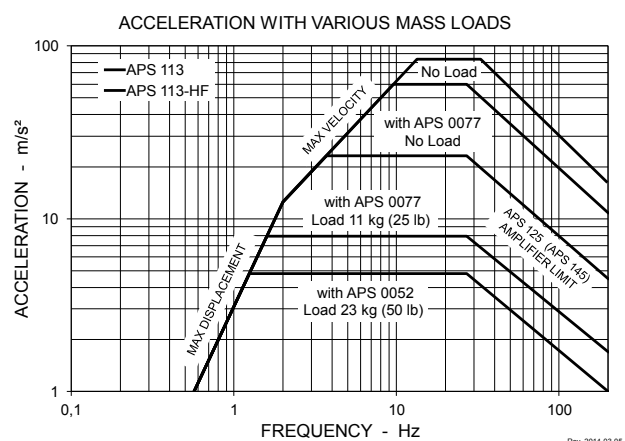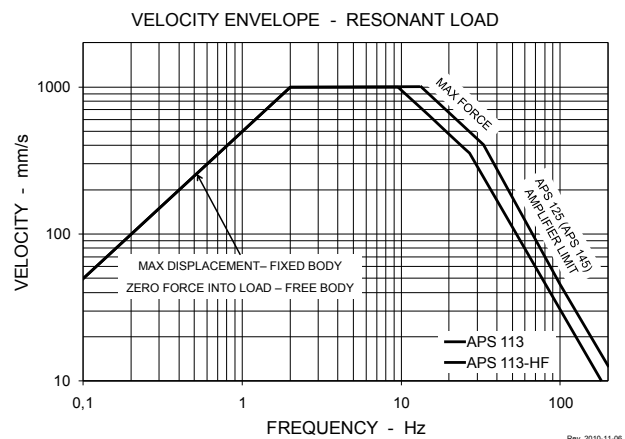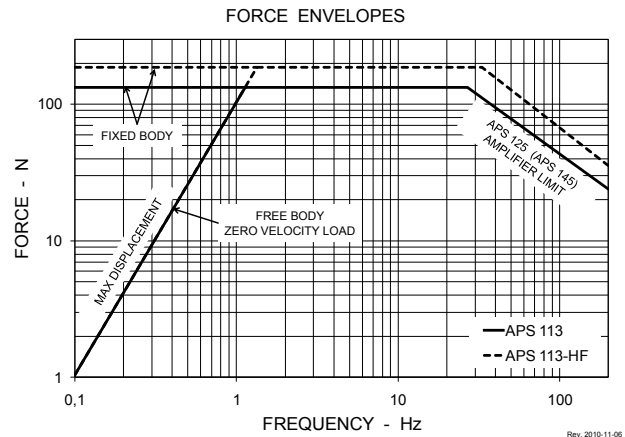

### Optional Configurations

#### APS 113-HF

All features of the basic APS 113 shaker are retained. The drive coil is made for 40 % increase in force with a 50 % duty cycle (30 min cycle).

# APS 113 ELECTRO-SEIS®

## Long Stroke Shaker with Linear Ball Bearings

### Specifications

Shaker	APS 113	APS 113-HF High Force
Force (Sine Peak)	133 N (30 lbf)	186 N (42 lbf)
Velocity (Sine Peak)	1,000 mm/s (39 inch/s)	
Stroke (Peak - Peak)	158 mm (6.25 inch)	
Frequency Range	DC ... 200 Hz	
Operation	horizontal or vertical	
Armature Weight	2.3 kg (5.1 lb)	
Max. Overhung Load at Armature Attachment Point	9.0 kg (20 lb)	
DC Coil Resistance	4.4 or 1.1 Ω	1.4 Ω
Total Shaker Weight	36.0 kg (80 lb)	
Shipping Weight	41.0 kg (90 lb)	
Overall Dimension L x W x H	526 x 213 x 168 mm (20.7 x 8.4 x 6.6 inch)	
Operating Temperature	5 ... 40 degrees C	
Storage Temperature	-25 ... 55 degrees C	

### Accessories (optional)

Shaker	APS 113	APS 113-HF High Force
Power Amplifier	APS 125	
System Cable for Connecting Shaker to Amplifier	APS 0082-6E	
Auxiliary Table Kit – Horizontal	APS 0052	
Auxiliary Table Kit – Vertical	APS 0077	
Auxiliary Table Kit – Horizontal and Vertical	APS 0078	
Carrying Handles and Tie-down Bars	APS 0108	
Zero Position Controller for Vibration Exciter	APS 0109	
Reaction Mass Assembly	APS 0112	
Lifting Handles (Set of 4)	APS 0414	
Overtravel Switch	APS 8543	
Modal Stinger Kit	APS 8610	
Steel Cable Kit	APS 8611	

Additional accessories available