






"P" Type "J" Coils



DESCRIPTION


1/2 inch (13mm) I.D Coil.

FEATURES

- One piece encapsulated design that is:
- Weatherproof. (When applied with o-rings.)
 - No external metal shell.

COIL SPECIFICATIONS

Wattage	21 Watts Nominal
Duty Rating	Continuous Duty +/- 10% rated voltage at 120° F (49° C) ambient
Min Current for Actuation	80% of rated current at room temp.
Magnet Wire Class	H or Better for all voltages
Temperature Range	-40° to 392° F (-40° to 200° C)
Encapsulation Material	Thermo-Plastic, resistant to moisture, caustic solutions, fungus, and vibrations

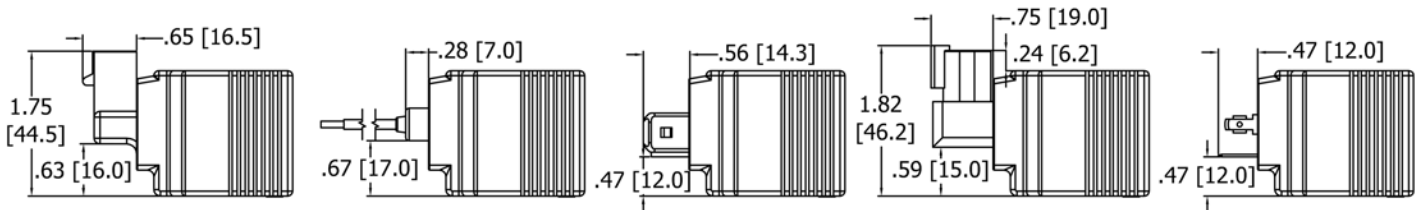






JA

JL

JJ

JD

JH



ORDERING INFORMATION

	P - - - -		
	TERMINATIONS		VOLTAGE
AMP Superseal - Integral	JA	12	12 VDC / 1.75 Amp
Deutsch - Integral DT04-2P	JD	24	24 VDC / .875 Amp
AMP Jr. Timer - Integral	JJ		
Metri-Pack - Integral	JM		
Double Lead	JL		
DIN 43650 (Hirschman)	JH		

Approximate Coil Weight: .43 lbs. (.19 kg.)

WARNING: The specifications/application data shown in our catalogs and data sheets are intended only as a general guide for the product described (herein). Any specific application should not be undertaken without independent study, evaluation, and testing for suitability.