

# XPR113

CELCO® PROFIL  
EVERYWHERE CONNECTIONS




Electric rotary joint with slip ring, for the transmission on 360° of power ratings, auxiliaries, digital and analog signals.

Without through hole

With aluminium cover, diameter of 110mm

### Technical specifications:

- Insulation voltage up to 600V
- Rings: brass
- Rings output cable: axials
- Brushes output cable: radial
- Standard degree of protection IP54
- Ring-brush contact resistance: < 20 mohm

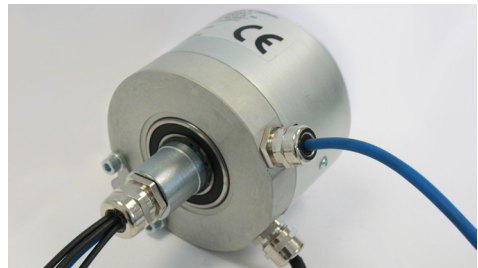

### Applications:

- Rotating tables
- Lighting signs
- Heated rollers.

Model	Rings N°	Power Rings	Auxiliary rings	RPM max
XPR113-(4p+2s)	6	4x20Amp	2x4Amp	300
XPR113-10p	10	10x20Amp	-	300
XPR113-12p	12	12x20Amp	-	300
XPR113-(5p+6s)C4	11	5x20Amp	6x4Amp	250
XPR113-(5p+12s)C2	17	5x20Amp	12x2Amp	250
XPR113-(5p+12s)C4	17	5x20Amp	12x4Amp	250
XPR113-(5p+18s)C4	23	5x20Amp	18x4Amp	250
XPR113-(5p+24s)C2	29	5x20Amp	24x2Amp	250
XPR113-(5p+36s)C2	41	5x20Amp	36x2Amp	250
XPR113-(10p+6s)C4	16	10x20Amp	6x4Amp	250
XPR113-(10p+12s)C2	22	10x20Amp	12x2Amp	250
XPR113-(10p+12s)C4	22	10x20Amp	12x4Amp	250
XPR113-(10p+18s)C4	28	10x20Amp	18x4Amp	250
XPR113-(10p+24s)C2	34	10x20Amp	24x2Amp	250
XPR113-(10p+36s)C2	46	10x20Amp	36x2Amp	250

