

OUTDOOR CURRENT TRANSFORMER


STANDARD : IEC - ANSI - CSA

INSULATION LEVEL : up to 1.2 kV


PRIMARY CURRENT : up to 5000A

1 to 2 secondary cores



TYPE : TE3

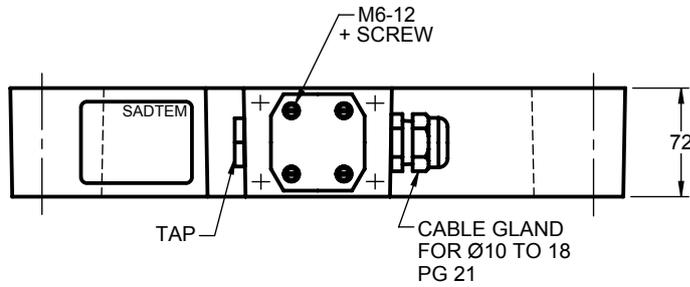

BOITIER SECONDAIRE



RATED TIGHTENING TORQUE (±5%)
Secondary terminals (M6) : 7 N.m

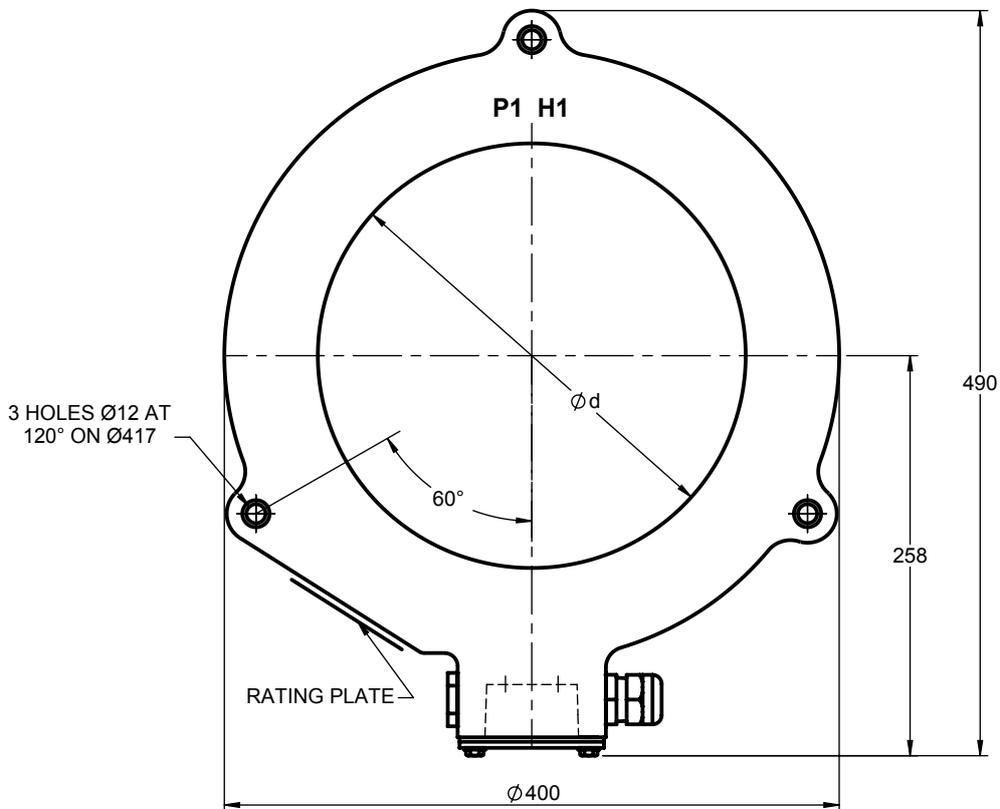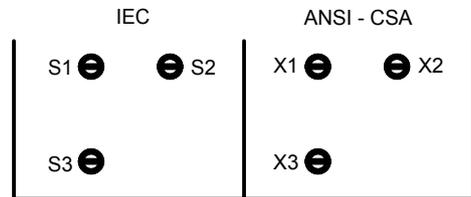

Ød AVAILABLE : 220 - 260 - 270 - 280 - 300 - 310

Approx. Weight : 19 to 25 Kg

This document is the property of SADTEM and may be changed without prior notice

Créat : 23.05.1991

SADTEM

BP 655
59506 DOUAI CEDEX
FRANCE

D

Rév: 14.10.2013

INSTRUMENT TRANSFORMERS

N°2-27161