MANUAL GREASE TRAP for restaurants

REF: CG-MAN


Application:


• The unit separates and stores grease, oils and refuse present in the water from the kitchen sinks. Manual, quick and simple grease recovery.

Characteristics:

- Compact shell in AISI 304/316 stainless steel.
- Easily removable screening basket for solid refuse recovery.
- Easy to handle, fast installation, basic maintenance.
- In accordance with EN 1825 Standard.



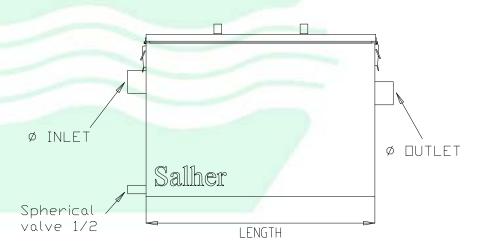



REF.	FLOW [L/S]	WIDTH [mm]	LENGTH [mm]	HEIGHT [mm]	Capacity [L]	Ø Inlet [inches]	Ø Outlet [inches]
CG-MAN-MINI	0,75	350	400	350	49	1 1/2,"	1 ^{1/2} "
CG-MAN-MED	1,5	350	600	400	84	2"	2"
CG-MAN-MAX	3	500	800	500	200	2"	2"

