



smartGAS.

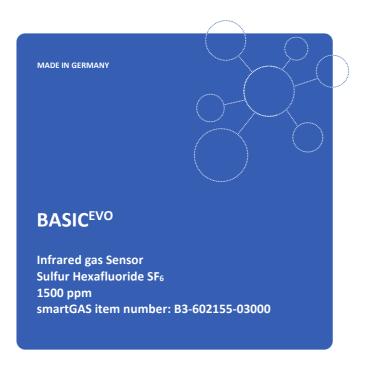


- Pre calibrated
- Low drift
- Gas entry by diffusion
- 3.3 6 V DC supply voltage
- Modbus ASCII or RTU
- Status indication by LED





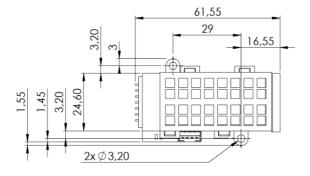



30,60

Application examples

SF₆ purity analysis SF₆ quality control Laboratory measurements High voltage cables High voltage transformers

Available equipment

Connect Interface Wall mount enclosure Calibration software Mounting equipment

Available design in support

Mechanical installation
Data communication
also, as complete Transmitter



BASICEVO I Sulfur Hexafluoride SF₆ I B3-602155-03000

General features

Measurement principle:	Non Dispersive Infra-Red (NDIR), dual wavelength
Measurement range:	0 1500 ppm Full Scale (FS)
Gas supply:	by diffusion (atmospheric pressure)
Mounting dimensions:	62 mm x 37 mm x 30 mm (L x W x H)
Warm-up time:	< 2 minutes (start up time)
	< 11 minutes (fade in finished)
	< 30 minutes (full specification)

Measuring response*

Response time (t ₉₀):	appr. 60 s
Digital resolution:	1 ppm
Detection limit (3 σ):	≤ 10 ppm
Repeatability:	≤ ± 20 ppm
Linearity error (straight line deviation):	≤ ± 30 ppm
Long term stability (zero):	≤ ± 30 ppm over 12 month period
Long term stability (span):	≤ ± 40 ppm over 12 month period

Influence of T, P, flow rate, other*

Temp. dependence (zero):	≤±3 ppm per °C
Temp. dependence (span):	≤±6 ppm per °C
Pressure dependence:	+ 0.100 % of actual reading / hPa

Electrical parameters

Supply current (peak): < 400 mA @ 3.3 V, < 240 mA @ 5.0 V Inrush current: < 450 mA Average power consumption: < 800 mW Digital output signal: Modbus ASCII / RTU via UART, autobaud, autoframe Calibration: zero and span by SW	Supply voltage	3.3 V 6.0 VDC
Average power consumption: < 800 mW Digital output signal: Modbus ASCII / RTU via UART, autobaud, autoframe	Supply current (peak):	< 400 mA @ 3.3 V, < 240 mA @ 5.0 V
Digital output signal: Modbus ASCII / RTU via UART, autobaud, autoframe	Inrush current:	< 450 mA
, , , , ,	Average power consumption:	< 800 mW
Calibration: zero and span by SW	Digital output signal:	Modbus ASCII / RTU via UART, autobaud, autoframe
	Calibration:	zero and span by SW

Climatic conditions

Operating temperature:	-20 + 40 °C
Storage temperature:	-20 + 60 °C
Air pressure:	800 1150 hPa
Ambient humidity:	0 95 % relative humidity (not condensing)

^{*} Typical values related to 1013 hPa, Ta = 22 °C, flow = 0.7 l / min for dry (not condensing) and clean sample gas. Stated values exclude calibration gas tolerance.

All rights reserved. Any logos and/or product names are trademarks of smartGAS. The reproduction, transfer, distribution or storage of information contained in this brochure in any form without the prior written consent of smartGAS is strictly prohibited. All specifications – technical included – are subject to change without notice. Depending on the application, the target gas and the measurement range the technical data may differ. No liability is accepted for any consequential losses, injury or damage resulting from the use of this document or from any omissions or errors herein. The data is given for guidance only. It does not constitute a specification or an offer for sale.

For more information, please visit www.smartgas.eu or contact us at sales@smartgas.eu

Please consult smartGAS sales for parts specified with other temperature and measurement ranges. At first initiation and depending on application and ambient conditions recalibration is recommended. Recurring cycles of recalibration are recommended.