

## CLASS I HYDROCARBON SEPARATOR BY COALESCENCE WITH TWO SEPARATION CHAMBERS

REF: CHC-SH-L-2


### Application:

- Mineral oil, grease and hydrocarbon separation from water (gravity and coalescing separation) by density difference. This unit does not separate emulsified oil.

**NOTE:** For organic oil and grease removal (from vegetables and animals), please refer to chapter nº1: Grease Separators.

### Characteristics:

- Salher brand, model CHC-SH-L-2. Class I, outlet oil concentration smaller than 5 ppm.
- Designed according to DIN 1999 and UNE 858 Standards.
- Manufactured in Glass Fiber Reinforced Polyester (GFRP) with orthophthalic resins.
- Oil and hydrocarbon separation and solids settling chambers.
- Separated oil and hydrocarbon on the water's surface.
- Coalescing plates with a large specific surface area:  $240\text{m}^2/\text{m}^3$ .
- Oil removal through manholes.
- PVC inlet and outlet pipes. Outlet in the manhole to install a ventilation pipe.
- Optional: oil and hydrocarbon detection alarm with outlet valve.

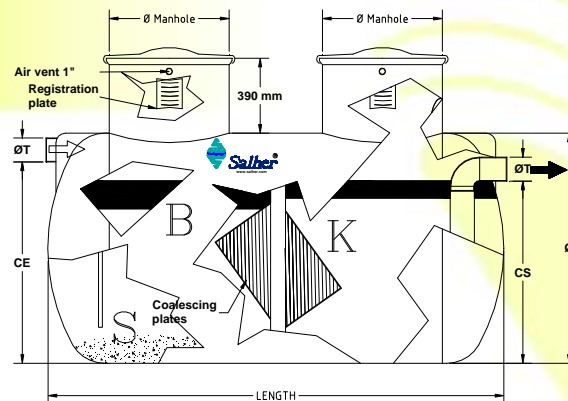

FLOW [L/S]	CAPACITY [liters]	Ø [mm]	LENGTH [mm]	Ø PIPE [mm]	Ø MANHOLE [mm]
3	1.400	1.000	2.070	110	500
5	2.400	1.200	2.360	125	620
7	3.000	1.200	2.890	160	620
10	5.000	1.400	3.530	160	620
15	7.000	1.700	3.420	160	620
20	12.000	1.700	5.620	200	620
25	15.000	2.000	5.170	250	620

FLOW (L/S) CAPACITY (L) DIMENSIONS (MM). FOR LARGER FLOWS, PLEASE CONSULT US