

## BATTERY-POWERED DRIVER DRILL



**Powerful, extremely compact 9.6-volt battery-operated driver drill for light to medium drilling and screwing work. Supplied in a case with 30-minute charger AL 30-SD-Li and two 2.0 Ah NiCd batteries.**

**BS 96-A solid**  
**Art. No. 0700 182 3**

**High-quality fully metallic two-gear planetary gearing.**

Long shelf life and optimal power transmission.

**20 torque levels and one drilling level.**

The correct setting for the respective screwing or drilling job.

**Ergonomical design with soft components.**

Pleasant, fatigue-free working.

**Battery rail system.**


Optimum hold and good current transfer for maximum performance.

**3-year warranty.**

All manufacturing or material defects will be repaired free of charge during this period.

Delivery scope		
Designation	Art. No.	P. Qty.
BS 96-A Solid Battery-Powered Driver Drill	<b>0700 182 3</b>	1
Battery SD 2.0 Ah NiCd	<b>0700 980 220</b>	2
Charger AL 30-SD-Li	<b>0700 887</b>	1
Empty carrying case	<b>0955 700 182</b>	1

Technical Data		
Power output		200 W
Battery capacity		2.0 Ah
Idling speed 1st/2nd gear		0 - 300 / 1,000 rpm
Torque adjustment range		0.5 - 6 Nm
Max. torque		27 Nm
Max. drilling capacity in	Metal	10 mm
	Aluminum	10 mm
	Wood	20 mm
Recommended drilling capacity in	Metal	6.5 mm
	Aluminum	8 mm
	Wood	16 mm
Max. screw diameter		6 mm
Recommended screw diameter		5 mm
Drill chuck span		1 - 10 mm
Drill chuck holder		3/8"-24 UNF
Weight of machine without battery approx.		1.2 kg
Weight of individual battery approx.		0.6 kg

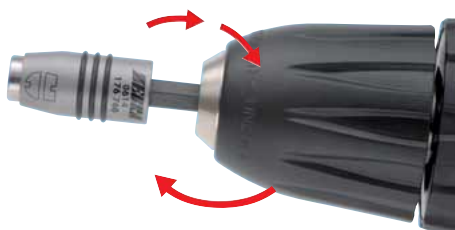

Spindle lock and single-sleeve chuck provide for comfortable, one-handed tool change.



The battery can effortlessly be removed from the rail system.

