



**Capacitive Sensors**  
**Series 70 - NPN**  
**Series 80 - PNP**










- Housing M 32 x 1.5
- Housing material: Brass
  - Sensing distance 0.5...30 mm adjustable

Certificate:



Technical data	Flush mountable	Flush mountable
Operating distance $S_n$	20 mm	20 mm
Operating distance min. / max. adjustable	0.5...30 mm	0.5...30 mm
Electrical version	3-wire DC	4-wire DC
Output function	Normally open (NO)	Antivalent (NO + NC)
<b>Type NPN</b>	<b>KAS-70-30-S-M32</b>	<b>KAS-70-30-A-M32</b>
<b>Art.-No.</b>	<b>716 200</b>	<b>715 800</b>
Connection diagram No.	1	3
<b>Type PNP</b>	<b>KAS-80-30-S-M32</b>	<b>KAS-80-30-A-M32</b>
<b>Art.-No.</b>	<b>816 200</b>	<b>815 800</b>
Connection diagram No.	4	6
Operating voltage ( $U_B$ )	10...35 V DC	10...35 V DC
Output current max. ( $I_o$ )	250 mA	2 x 250 mA
Voltage drop max. ( $U_d$ )	≤ 2.0 V	≤ 2.0 V
Permitted residual ripple max.	10%	10%
No-load current ( $I_o$ )	Typ. 15 mA	Typ. 15 mA
Frequency of operating cycles max.	200 Hz	200 Hz
Permitted ambient temperature	-25...+70 °C	-25...+70 °C
LED-display	Green / yellow	Green / yellow
Protective circuit	Built-in	Built-in
Degree of protection IEC 60529	IP 67	IP 67
Norm	EN 60947-5-2	EN 60947-5-2
Connection cable	2 m, PVC, 3 x 0.75 mm <sup>2</sup>	2 m, PVC, 4 x 0.5 mm <sup>2</sup>
Housing material	Brass	Brass
Active surface	PTFE (FDA 21 CFR 177.1550)	PTFE (FDA 21 CFR 177.1550)
Lid	PA / PPO	PA / PPO
Media optimized	Yes	Yes

All specifications are subject to change without notice. (07/2011)

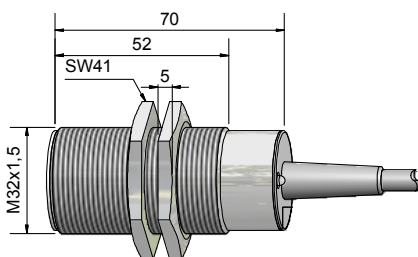

**Made in Germany**